SERVICE PARTS LIST

BULLETIN NO. 54-00-2560

SPECIFY CATALOG NO. AND SERIAL NO. WHEN ORDERING PARTS	REVISED BULLETIN	DATE
5 H.P. ALTERNATOR—2250 WATTS		July '80
CATALOG NO. 4505 — STARTING SERIAL NO. H793 477202	WIRING INSTRUCTION	58-01-0966

3600 R.P.M.



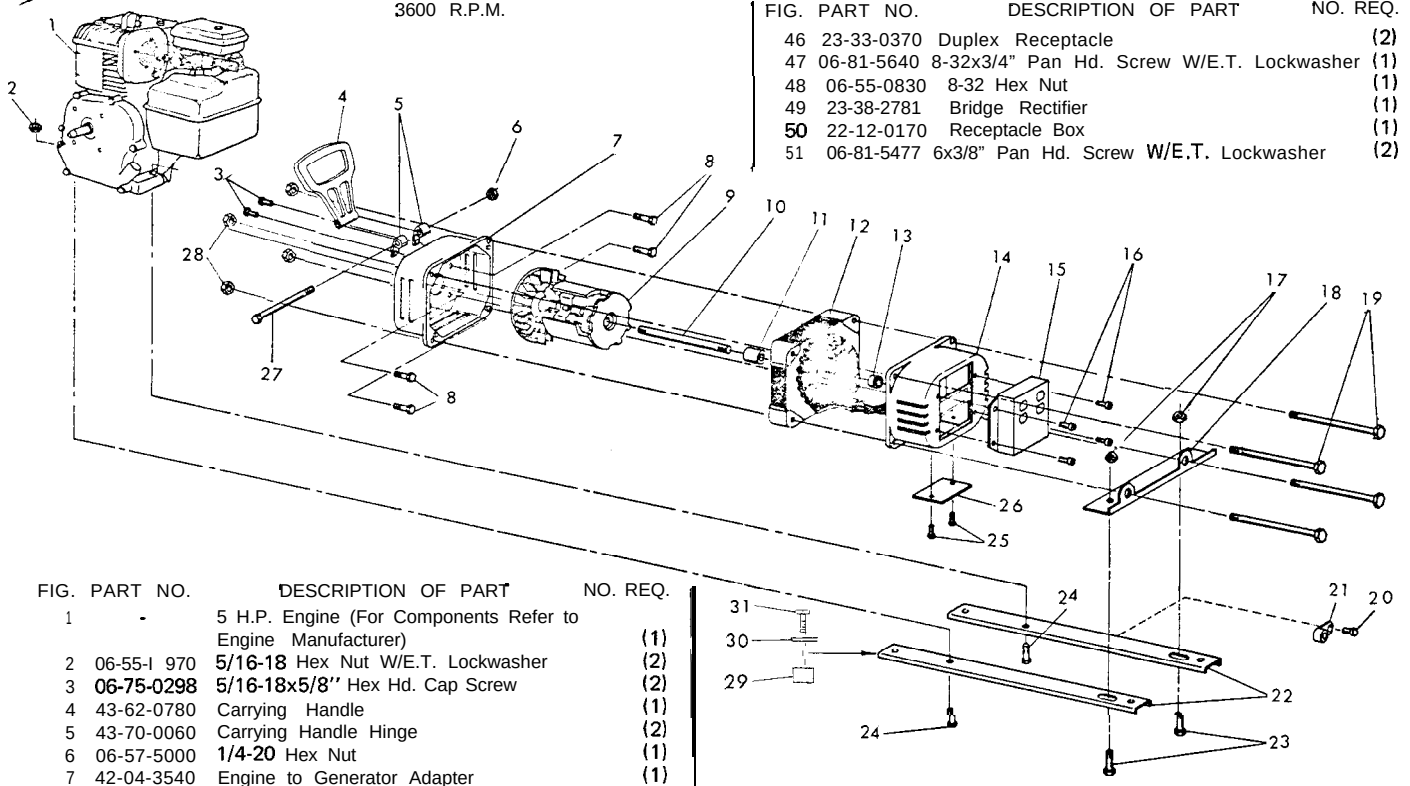


FIG.	PART NO.	DESCRIPTION OF PART	NO. REQ.
1	-	5 H.P. Engine (For Components Refer to Engine Manufacturer)	(1)
2	06-55-I 970	5/16-18 Hex Nut W/E.T. Lockwasher	(2)
3	06-75-0298	5/16-18x5/8" Hex Hd. Cap Screw	(2)
4	43-62-0780	Carrying Handle	(1)
5	43-70-0060	Carrying Handle Hinge	(2)
6	06-57-5000	1/4-20 Hex Nut	(1)
7	42-04-3540	Engine to Generator Adapter	(1)
8	06-75-0352	5/16-24x3/4" Hex Hd. Cap Screw	(4)
9	23-40-0480	Rotor (Includes 22-84-0730 Fan)	(1)
10	06-92-I 255	5/16x5.99"Stud	(1)
11	45-22-0370	Sleeve	(1)
12	23-58-0640	Stator	(1)
13	06-55-3780	Nut	(1)
14	-	End Bell	(1)
15	-	Receptacle Box	(1)
16	06-95-0310	10-32x3/8" Pan Hd. Screw	(4)
17	06-55-I 970	5/16-18 Hex Nut W/E.T. Lockwasher	(2)
18	42-36-I 290	Generator Mounting Bracket	(1)
19	06-75-I 240	1/4-20x4-1/2" Hex Hd. Cap Screw	(4)
20	06-75-0021	10-32x1/2" Hex Hd. Cap Screw W/E.T.	(1)
21	23-74-0760	Ground Lug	(1)
22	42-20-0560	Mounting Channel	(2)
23	06-75-0302	5/16-18x3/4" Hex Hd. Cap Screw W/E.T.	(2)
24	06-75-0330	5/16-18x1/2" Hex. Hd. Cap Screw W/E.T.	(2)
25	06-75-2350	10-32x3/8" Hex. Hd. Cap Screw	(2)
26	22-68-0160	Cover	(1)
27	06-75-I 240	1/4-20x4-1/2" Hex. Hd. Cap Screw	(1)
28	06-55-I 505	1/4-20 Hex. Nut W/E.T. Lockwasher	(4)
29	44-34-0130	Vibration Dampener	(4)
30	45-88-7710	1-1/2" O.D x 1/4" Thick Washer	(4)
31	06-75-0297	5/16-18x1/2" Hex. Hd. Cap Screw	(4)
32	02-50-4250	Roller Bearing	(1)
33	44-60-0580	Locking Pin	(4)
34	06-81-5670	No. 6x3/8" Pan Hd. Tapping Screw	(4)
35	42-36-0990	Capacitor Mounting Bracket	(1)
36	22-33-0230	Capacitor	(1)
37	42-25-0320	End Bell	(1)
38	23-94-9690	3" Lead	(1)
	23-94-9695	3-1/4" Lead	(1)
39	22-20-0310	Brush Guide	(1)
40	22-1 B-051 0	Carbon Brush	(2)
41	23-74-0770	Terminal Tab	(2)
42	23-74-0490	Terminal Tab	(1)
43	06-75-0014	No. 6x5/8" Hex Hd. Cap Screw	(1)
44	23-74-0580	3 Place Terminal	(1)
45	22-36-0100	15 Amp Circuit Breaker	(2)
46	23-33-0370	Duplex Receptacle	(2)
47	06-81-5640	8-32x3/4" Pan Hd. Screw W/E.T. Lockwasher	(1)
48	06-55-0830	8-32 Hex Nut	(1)
49	23-38-2781	Bridge Rectifier	(1)
50	22-12-0170	Receptacle Box	(1)
51	06-81-5477	6x3/8" Pan Hd. Screw W/E.T. Lockwasher	(2)

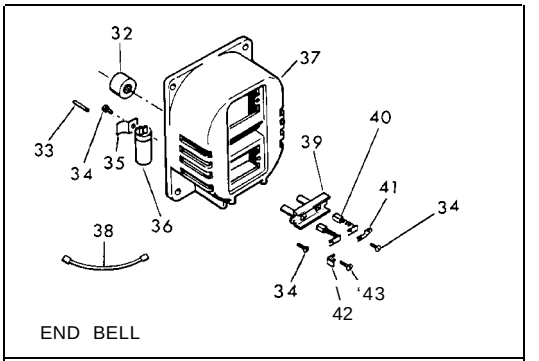

END BELL

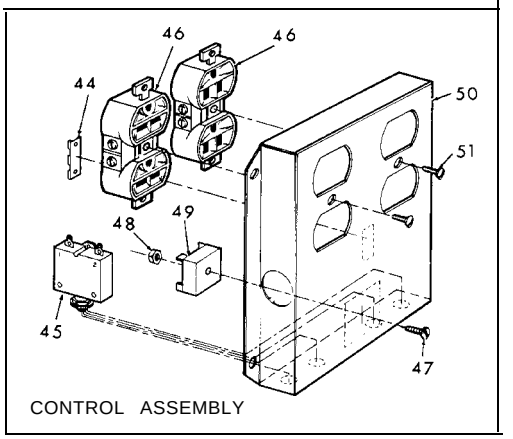

CONTROL ASSEMBLY

MILWAUKEE ELECTRIC TOOL CORPORATION
13135 W. LISBON RD., BROOKFIELD, WIS. 53005