
JET E-1440VS | Stock 892030

Diagram A - HEADSTOCK ASSEMBLY (1 of 3)

Original JET parts reference | Match model, voltage and serial-number notes

HEADSTOCK ASSEMBLY

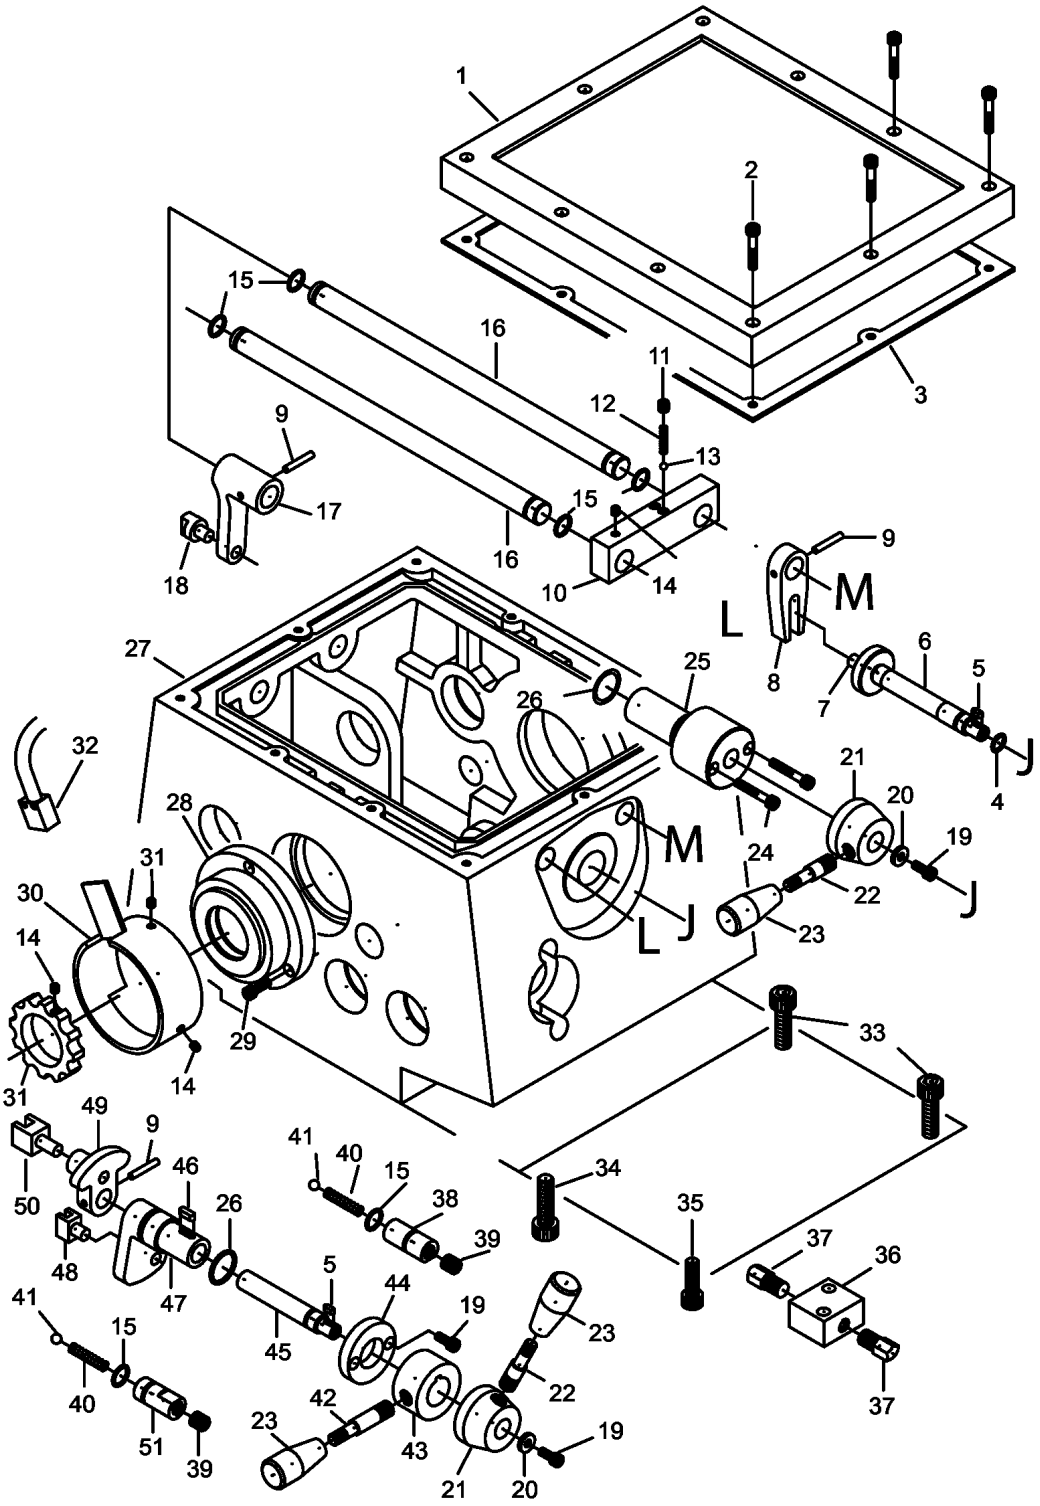


mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram A - HEADSTOCK ASSEMBLY (2 of 3)

Original JET parts reference | Match model, voltage and serial-number notes

HEADSTOCK ASSEMBLY

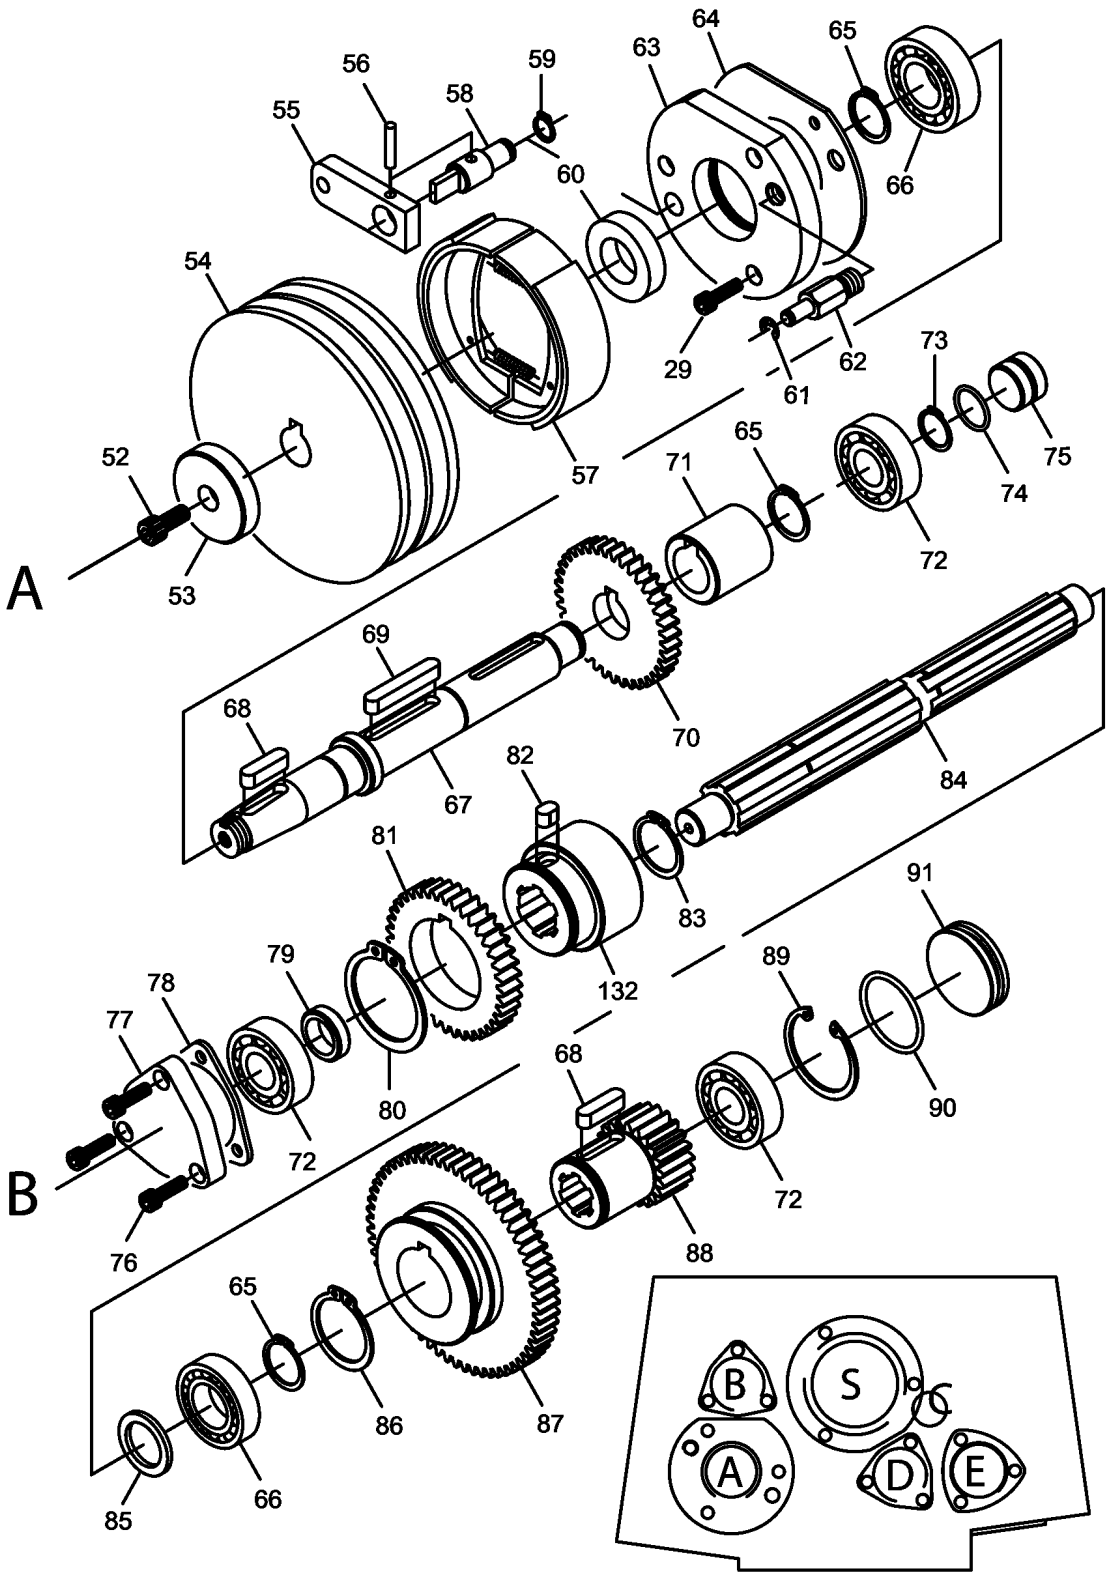


mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram A - HEADSTOCK ASSEMBLY (3 of 3)

Original JET parts reference | Match model, voltage and serial-number notes

HEADSTOCK ASSEMBLY

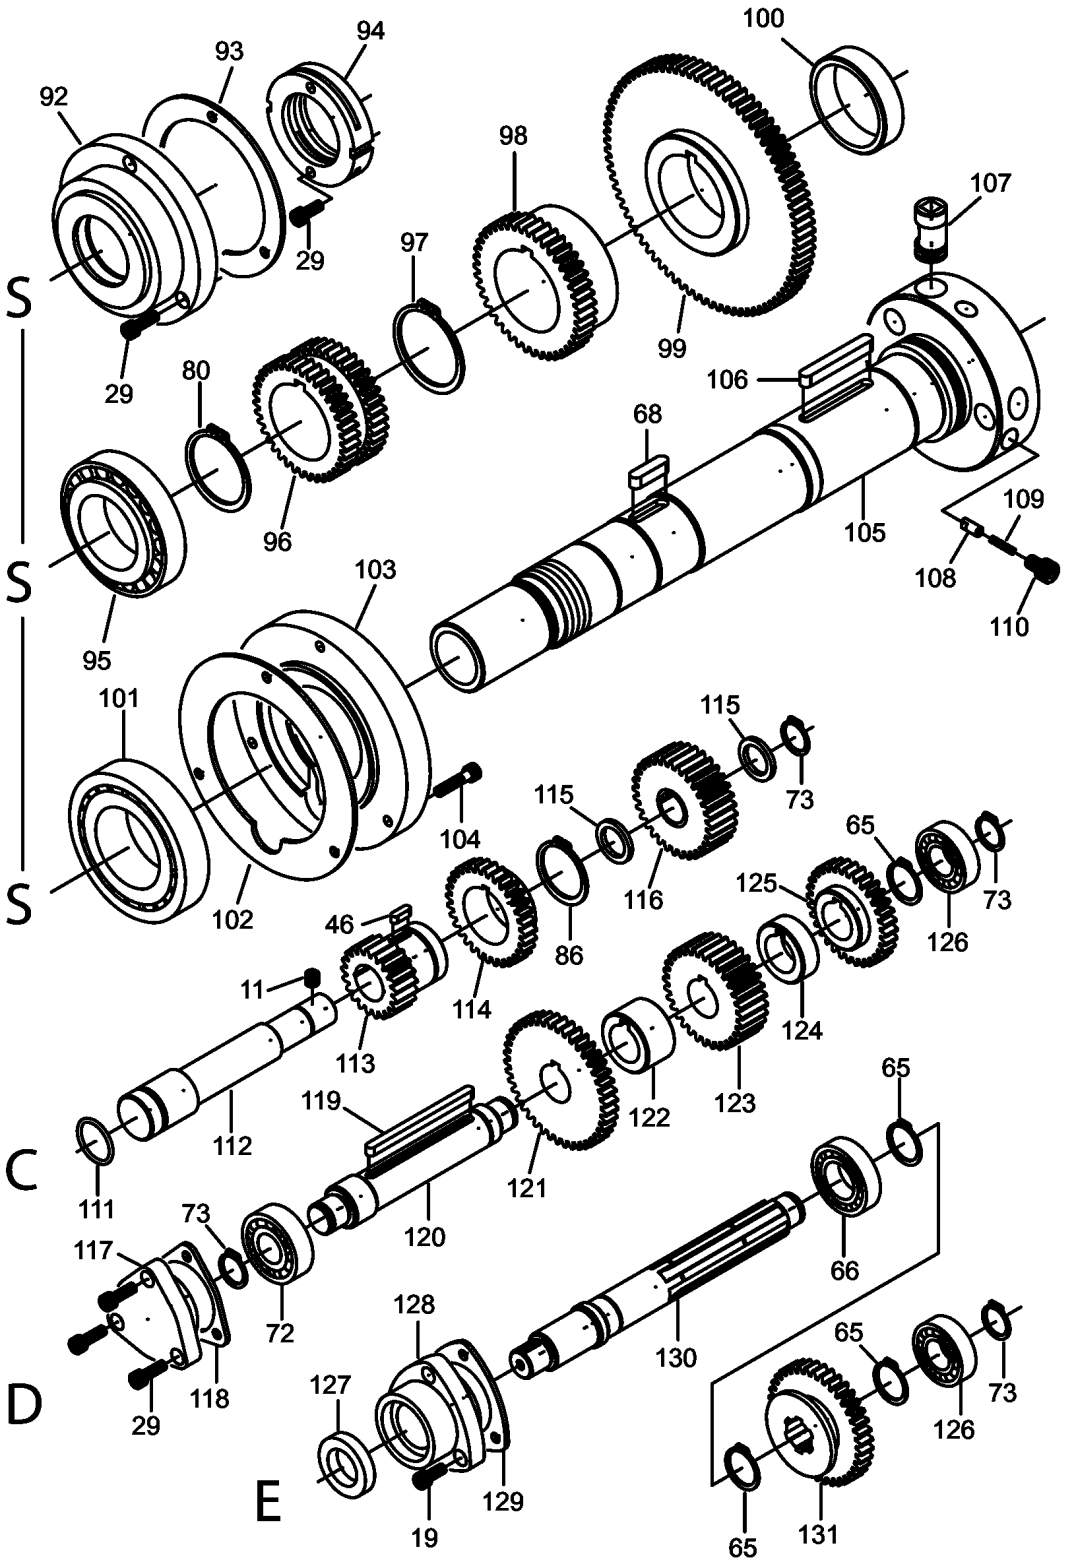

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List A - HEADSTOCK ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
1	JT9-E1340VS-A01	Cover	355L*299W*30H	1
2	JT9-TS-1503081	Socket Head Cap Screw	M6*35mm	10
3	JT9-E1340VS-A03	Gasket		1
4	JT9-E1340VS-A04	O-Ring	11*16*2.5 mm.	1
5	JT9-E1340VS-A05	Key	4*10 mm.	2
6	JT9-E1340VS-A06	Shaft	Ø40*132L	1
7	JT9-E1340VS-A07	Pin	Ø10*19L	1
8	JT9-E1340VS-A08	Lever	Ø19.05	1
9	JT9-E1340VS-A09	Pin	5*30 mm.	3
10	JT9-E1340VS-A10	Bracket	30W*20T*125L Ø19.05	1
11	CM9-TS-1524011	Set Screw	M8*8mm	3
12	JT9-E1340VS-A12	Spring	1/4 in.*35mm.	2
13	JT9-SB-1/4	Ball Steel	1/4 in. dia.	2
14	JT9-TS-1523011	Set Screw	M6*6mm	5
15	JT9-E1340VS-A15	O-Ring	14*19*2.5 mm.	6
16	JT9-E1340VS-A16	Shaft	Ø3/4"*350L	2
17	JT9-E1340VS-A17	Shift Lever	Ø19.05	1
18	JT9-E1340VS-A18	Shift Fork	Ø19*26.5	1
19	CM9-TS-1503031	Socket Head Cap Screw	M6*12mm	7
20	JT9-E1340VS-A20	Washer	Ø5/8"Ø1/4"*3t	2
21	JT9-E1340VS-A21	Handle	Ø50*30L Ø12	2
22	JT9-E1340VS-A22	Lever	Ø1/2"*50L	2
23	JT9-E1340VS-A23	Handle	3/8 in.	3
	JT9-E1340VS-A23A	Handle Assy(including #22&23)		1
24	JT9-TS-1503101	Socket Head Cap Screw	M6*45mm	2
25	JT9-E1340VS-A25	Shaft		1
26	JT9-E1340VS-A26	O-Ring	24*30*3.0 mm.	2

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List A - HEADSTOCK ASSEMBLY (continued)

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
27	JT9-E1340VS-A27	Main Casting	300L*420W*260H	1
27	JT9-E1440VS-A27	Main Casting	300L*420W*273H	1
28	JT9-E1340VS-A28	Cover	Ø120*Ø47*45W	1
29	CM9-TS-1503041	Socket Head Cap Screw	M6*16mm	12
30	JT9-E1340VS-A30	Collar		1
31	JT9-E1340VS-A31	Gear		1
32	JT9-E1340VS-A32	Speed Sensor	NPN	1
33	JT9-TS-1506041	Socket Head Cap Screw	M12*35mm	2
34	CM9-TS-1506051	Socket Head Cap Screw	M12*40mm	1
35	JT9-TS-1505041	Socket Head Cap Screw	M10*30mm	1
36	JT9-E1340VS-A36	Set-Over Pad	40*45*25h	1
37	JT9-E1340VS-A37	Screws	17*40L	2
38	JT9-E1340VS-A38	Collar	Ø19.05*44L Ø10	1
39	JT9-TS-1523041	Set Screw	M6*12mm	2
40	JT9-E1340VS-A40	Spring	3/8in *40mm.	2
41	JT9-SB-3/8	Ball Steel	3/8 in. dia.	2
42	JT9-E1340VS-A42	Lever	Ø1/2"*65L	3
	JT9-E1340VS-A42A	Handle Assy(including #23&42)		1
43	JT9-E1340VS-A43	Collar	Ø50*Ø25*27W	1
44	JT9-E1340VS-A44	Collar	Ø54*Ø26*10W	2
45	JT9-E1340VS-A45	Shaft	Ø16*160L	1
46	JT9-E1340VS-A46	Key	5*15 mm.	2
47	JT9-E1340VS-A47	Shift Lever	Ø16*73W	1
48	JT9-E1340VS-A48	Shift Fork	14W*20H*26L	1
49	JT9-E1340VS-A49	Shift Lever	32W	1
50	JT9-E1340VS-A50	Shift Fork	20*20*42L	1
51	JT9-E1340VS-A51	Collar	Ø19.05*41L Ø10	1

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List A - HEADSTOCK ASSEMBLY (continued)

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
52	JT9-TS-1504041	Socket Head Cap Screw	M8*20mm	1
53	JT9-E1340VS-A53	Washer	Ø50.8*12W	1
54	JT9-E1340VS-A54	Pulley	Ø151*41L	1
55	JT9-E1340VS-A55	Lever	25W*10T*67L	1
56	JT9-E1340VS-A56	Pin	5*25 mm.	1
57	**	Brake		1
58	JT9-E1340VS-A58	Stud	Ø16*54L	1
59	JT9-E1340VS-A59	Circlip	S-12 mm.	1
60	JT9-E1340VS-A60	Oil Seal	TC 25*45*11 mm.	1
61	JT9-E1340VS-A61	Circlip	E-6 mm.	1
62	JT9-E1340VS-A62	Stud	14*50L	1
63	JT9-E1340VS-A63	Cover	Ø110*Ø42*16.4W	1
64	JT9-E1340VS-A64	Gasket		1
65	JT9-E1340VS-A65	Circlip	S-17 mm.	7
66	CM9-BB-6005	Bearing	NO. 6005	3
67	JT9-E1340VS-A67	Shaft	Ø32*251L	1
68	JT9-E1340VS-A68	Key	8*30 mm.	3
69	JT9-E1340VS-A69	Key	8*50 mm.	1
70	JT9-E1340VS-A70	Gear	2M 38T	1
71	JT9-E1340VS-A71	Collar	Ø38*Ø25*40L	1
72	JT9-E1340VS-A72	Bearing	NO. 6204	4
73	JT9-E1340VS-A73	Circlip	S-16 mm.	5
74	JT9-E1340VS-A74	O-Ring	20*25*2.5 mm.	1
75	JT9-E1340VS-A75	Bore Plug	Ø25*18L	3
76	JT9-TS-1523051	Set Screw	M6*16mm	3
77	JT9-E1340VS-A77	Cover	Ø47*Ø42	1
78	JT9-E1340VS-A78	Gasket		1

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List A - HEADSTOCK ASSEMBLY (continued)

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
79	JT9-E1340VS-A79	Collar	Ø28*Ø20*8t	1
80	JT9-E1340VS-A80	Circlip	S-21 mm.	2
81	JT9-E1340VS-A81	Gear	2M 39T	1
82	JT9-E1340VS-A82	Key	8*12 mm.	1
83	JT9-E1340VS-A83	Circlip	S-18 mm.	1
84	JT9-E1340VS-A84	Shaft	Ø30*281L	1
85	JT9-E1340VS-A85	Collar	Ø34.9*Ø25*3t	1
86	JT9-E1340VS-A86	Circlip	S-19 mm.	2
87	JT9-E1340VS-A87	Gear	2M 60T	1
88	JT9-E1340VS-A88	Gear	2M 21T	1
89	JT9-E1340VS-A89	Circlip	R-47 mm.	1
90	JT9-E1340VS-A90	O-Ring	38*45*3.5 mm.	1
91	JT9-E1340VS-A91	Bore Plug	Ø47*12W	1
92	JT9-E1340VS-A92	Cover		1
93	JT9-E1340VS-A93	Gasket		1
94	JT9-E1340VS-A94	Nut	Ø75*19W	1
95	JT9-BB-30210	Bearing	NO. 30210	1
96	JT9-E1340VS-A96	Gear	2M 38T	1
97	JT9-E1340VS-A97	Circlip	S-22 mm.	1
98	JT9-E1340VS-A98	Gear	2M 43T	1
99	JT9-E1340VS-A99	Gear	2M 82T	1
100	JT9-E1340VS-A100	Collar	Ø65*Ø55*16.7W	1
101	**	Bearing	NO. 30211	1
102	JT9-E1340VS-A102	Gasket		1
103	JT9-E1340VS-A103	Cover	Ø150*Ø65*24W	1
104	CM9-TS-1503061	Socket Head Cap Screw	M6*25mm	3
105	JT9-E1340VS-A105	Spindle	Ø117.5*456.2L	1

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List A - HEADSTOCK ASSEMBLY (continued)

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
106	JT9-E1340VS-A106	Key	8*60 mm.	1
107	JT9-E1340VS-A107	Cam		3
108	JT9-E1340VS-A108	Pin		3
109	JT9-E1340VS-A109	Spring	3/16 in.*15mm.	3
110	JT9-TS-1504021	Socket Head Cap Screw	M8*12mm	3
111	JT9-E1340VS-A111	O-Ring	25*31*3.0 mm.	1
112	JT9-E1340VS-A112	Shaft	Ø30*165L	1
113	JT9-E1340VS-A113	Gear	2M 21T	1
114	JT9-E1340VS-A114	Gear	2M 32T	1
115	JT9-E1340VS-A115	Collar	Ø28*Ø20*3W	2
116	JT9-E1340VS-A116	Gear	2M 32T	1
117	JT9-E1340VS-A117	Cover	Ø47*Ø41	1
118	JT9-E1340VS-A118	Gasket		1
119	JT9-E1340VS-A119	Key	6*90 mm.	1
120	JT9-E1340VS-A120	Shaft	Ø28*162L	1
121	JT9-E1340VS-A121	Gear	2M 42T	1
122	JT9-E1340VS-A122	Collar	Ø40*Ø25*24W	1
123	JT9-E1340VS-A123	Gear	2M 32T	1
124	JT9-E1340VS-A124	Collar	Ø40*Ø25*14W	1
125	JT9-E1340VS-A125	Gear	2M 32T	1
126	JT9-BB-6004	Bearing	NO. 6004	2
127	JT9-E1340VS-A127	Oil Seal	TC 25*40*8 mm.	1
128	JT9-E1340VS-A128	Cover	Ø30*40W	1
129	JT9-E1340VS-A129	Gasket		1
130	JT9-E1340VS-A130	Shaft	Ø28*220L:25*21*5	1
131	JT9-E1340VS-A131	Gear	2M 38T	1
132	JT9-E1340VS-A132	Collar		1

** These parts are shown for reference only and are not available for order individually. Non-proprietary parts, such as fasteners, can usually be found at local hardware stores.


mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram B - GEAR BOX ASSEMBLY (1 of 2)

Original JET parts reference | Match model, voltage and serial-number notes

GEAR BOX ASSEMBLY

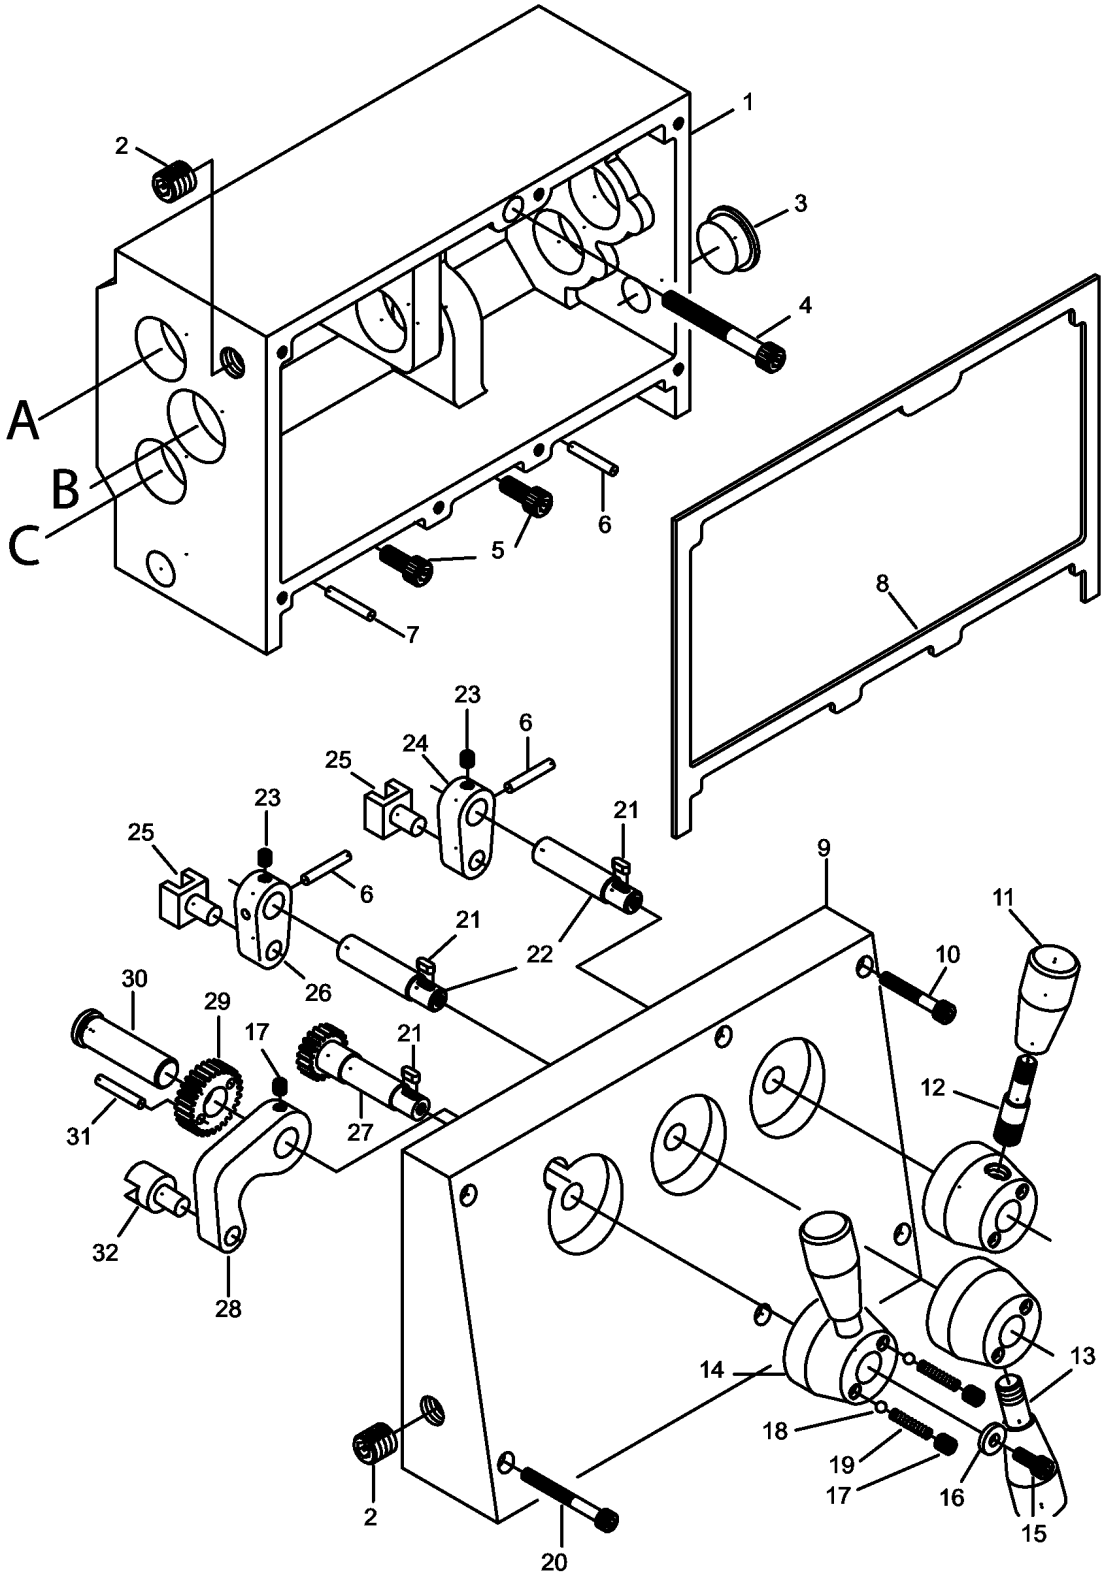


mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram B - GEAR BOX ASSEMBLY (2 of 2)

Original JET parts reference | Match model, voltage and serial-number notes

GEAR BOX ASSEMBLY

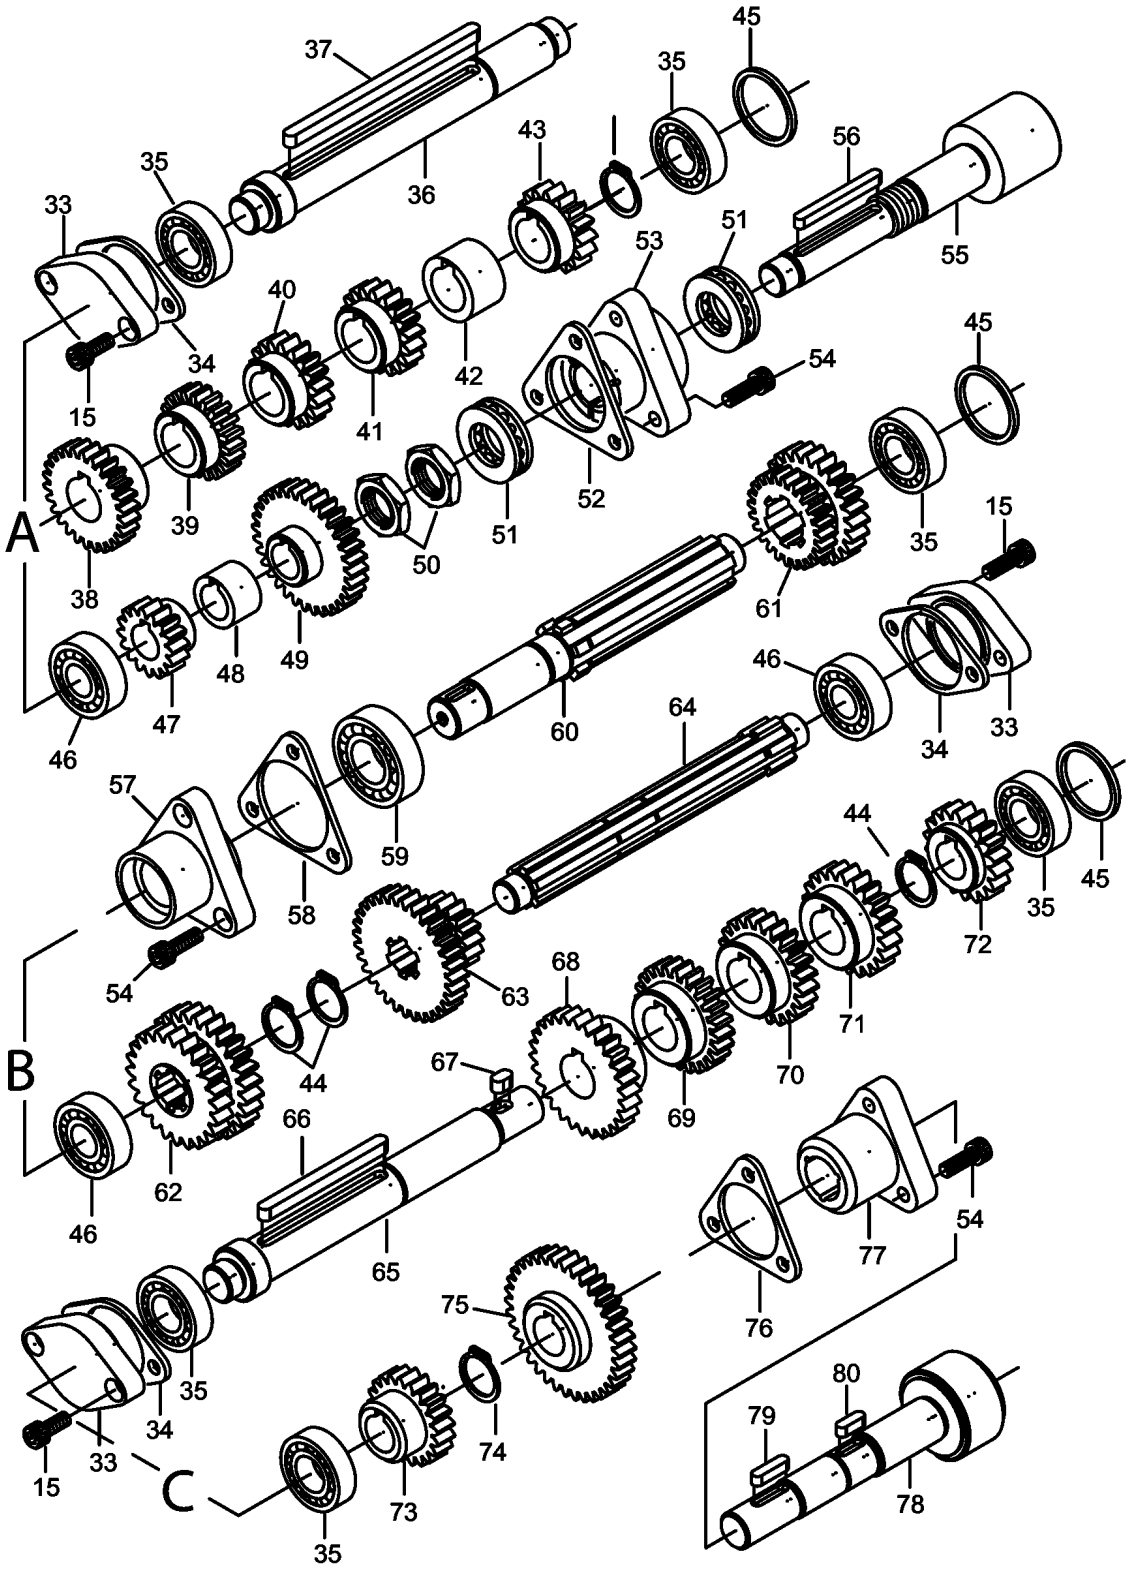

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List B - GEAR BOX ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
1	JT9-E1340VS-B01	Casting	300L*195W*120H	1
2	JT9-E1340VS-B02	Plug	3/8 G.P.	2
3	JT9-E1340VS-B03	Oil Sight	3/4 in. (19mm.)	1
4	JT9-TS-1504131	Socket Head Cap Screw	M8*70mm	1
5	JT9-TS-1504041	Socket Head Cap Screw	M8*20mm	2
6	JT9-E1340VS-B06	Pin	5*25 mm.	2
7	JT9-E1340VS-B07	Pin	5*30 mm.	1
8	JT9-E1340VS-B08	Gasket		1
9	JT9-E1340VS-B09	Front Cover		1
10	JT9-TS-1503091	Socket Head Cap Screw	M6*40mm	10
11	JT9-E1340VS-B11	Handle	3/8 in.	3
	JT9-E1340VS-B11A	Handle Assy (including #11&12)		1
12	JT9-E1340VS-B12	Lever	Ø1/2"*50L	2
13	JT9-E1340VS-B13	Lever	Ø1/2"*65L	1
	**	Handle Assy (including B11 & B13)		1
14	JT9-E1340VS-B14	Handle	Ø50*35L Ø12	3
15	CM9-TS-1503031	Socket Head Cap Screw	M6*12mm	8
16	JT9-E1340VS-B16	Washer		3
17	CM9-TS-1524011	Set Screw	M8*8mm	7
18	JT9-SB-1/4	Ball Steel	1/4 in. dia.	6
19	JT9-E1340VS-B19	Spring	1/4 in.*35mm.	6
20	JT9-TS-1503121	Socket Head Cap Screw	M6*55mm	4
21	JT9-E1340VS-B21	Key	4*10 mm.	3
22	JT9-E1340VS-B22	Shaft	Ø14*66L	2
23	JT9-TS-1523011	Set Screw	M6*6mm	1
24	JT9-E1340VS-B24	Lever	52L*15h	1
25	JT9-E1340VS-B25	Fork	20*20*28L	2

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List B - GEAR BOX ASSEMBLY (continued)

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
26	JT9-E1340VS-B26	Lever	15h	1
27	JT9-E1340VS-B27	Gear	1.25M 20T	1
28	JT9-E1340VS-B28	Lever	15T	3
29	JT9-E1340VS-B29	Gear	1.25M 28T	1
30	JT9-E1340VS-B30	Shaft	Ø3/4"*59L	1
31	JT9-E1340VS-B31	Pin	5*20 mm.	1
32	JT9-E1340VS-B32	Fork	Ø20*32L	2
33	JT9-E1340VS-B33	Cover	Ø35*Ø31 PCD48*13.4H	3
34	JT9-E1340VS-B34	Gasket		3
35	JT9-BB-6003	Bearing	NO. 6003	6
36	JT9-E1340VS-B36	Shaft	Ø24*189L	1
37	JT9-E1340VS-B37	Key	6*115 mm.	1
38	JT9-E1340VS-B38	Gear	1.75M 26T	1
39	JT9-E1340VS-B39	Gear	2M 20T	1
40	JT9-E1340VS-B40	Gear	2M 18T	1
41	JT9-E1340VS-B41	Gear	2M 18T	1
42	JT9-E1340VS-B42	Collar	Ø30*Ø20*19.5W	1
43	JT9-E1340VS-B43	Gear	2M 16T	1
44	JT9-E1340VS-B44	Circlip	S-16 mm.	4
45	JT9-E1340VS-B45	Gear	2M 23T	3
46	JT9-BB-6202	Bearing	NO. 6202	3
47	JT9-E1340VS-B47	Gear	1.75M 16T	1
48	JT9-E1340VS-B48	Collar	Ø24*Ø16*16W	1
49	JT9-E1340VS-B49	Gear	1.75M 32T	1
50	JT9-TS-0571082	Nut	6t 3/4"~16NF	2
51	JT9-BB-51104	Thrust	NO. 51104	2
52	JT9-E1340VS-B52	Gasket		1

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List B - GEAR BOX ASSEMBLY (continued)

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
53	JT9-E1340VS-B53	Cover	PCD54*37W Ø20	1
54	CM9-TS-1503041	Socket Head Cap Screw	M6*16mm	9
55	JT9-E1340VS-B55	Shaft	Ø36*157	1
56	JT9-E1340VS-B56	Key	5*50 mm	1
57	JT9-E1340VS-B57	Cover	36w Ø22	1
58	JT9-E1340VS-B58	Gasket		1
59	JT9-BB-6004	Bearing	NO. 6004	1
60	JT9-E1340VS-B60	Shaft	Ø27*174L 25*21*5	1
61	JT9-E1340VS-B61	Gear	1.75M 24T 2M 24T	1
62	**	Gear	2M 24T 2M 27T	1
63	JT9-E1340VS-B63	Gear	1.75M 32T 1.75M 16T	1
64	JT9-E1340VS-B64	Shaft	Ø22*176L 20*16*4	1
65	JT9-E1340VS-B65	Shaft	Ø25*189L	1
66	JT9-E1340VS-B66	Key	6*75 mm	1
67	JT9-E1340VS-B67	Key	6*10 mm	1
68	JT9-E1340VS-B68	Gear	1.75M 28T	1
69	JT9-E1340VS-B69	Gear	2M 24T	1
70	JT9-E1340VS-B70	Gear	2M 23T	1
71	JT9-E1340VS-B71	Gear	2M 22T	1
72	JT9-E1340VS-B72	Gear	2M 18T	1
73	JT9-E1340VS-B73	Gear	1.75M 21T	1
74	JT9-E1340VS-B74	Circlip	S-18 mm.	1
75	JT9-E1340VS-B75	Gear	1.75M 36T	1
76	JT9-E1340VS-B76	Gasket		1
77	JT9-E1340VS-B77	Cover	40W Ø20	1
78	JT9-E1340VS-B78	Gear	Ø42*145L	1
79	JT9-E1340VS-B79	Key	5*20 mm	1
80	JT9-E1340VS-B80	Key	5*15 mm	1

** These parts are shown for reference only and are not available for order individually. Non-proprietary parts, such as fasteners, can usually be found at local hardware stores.


mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram C - APRON ASSEMBLY (1 of 2)

Original JET parts reference | Match model, voltage and serial-number notes

APRON ASSEMBLY

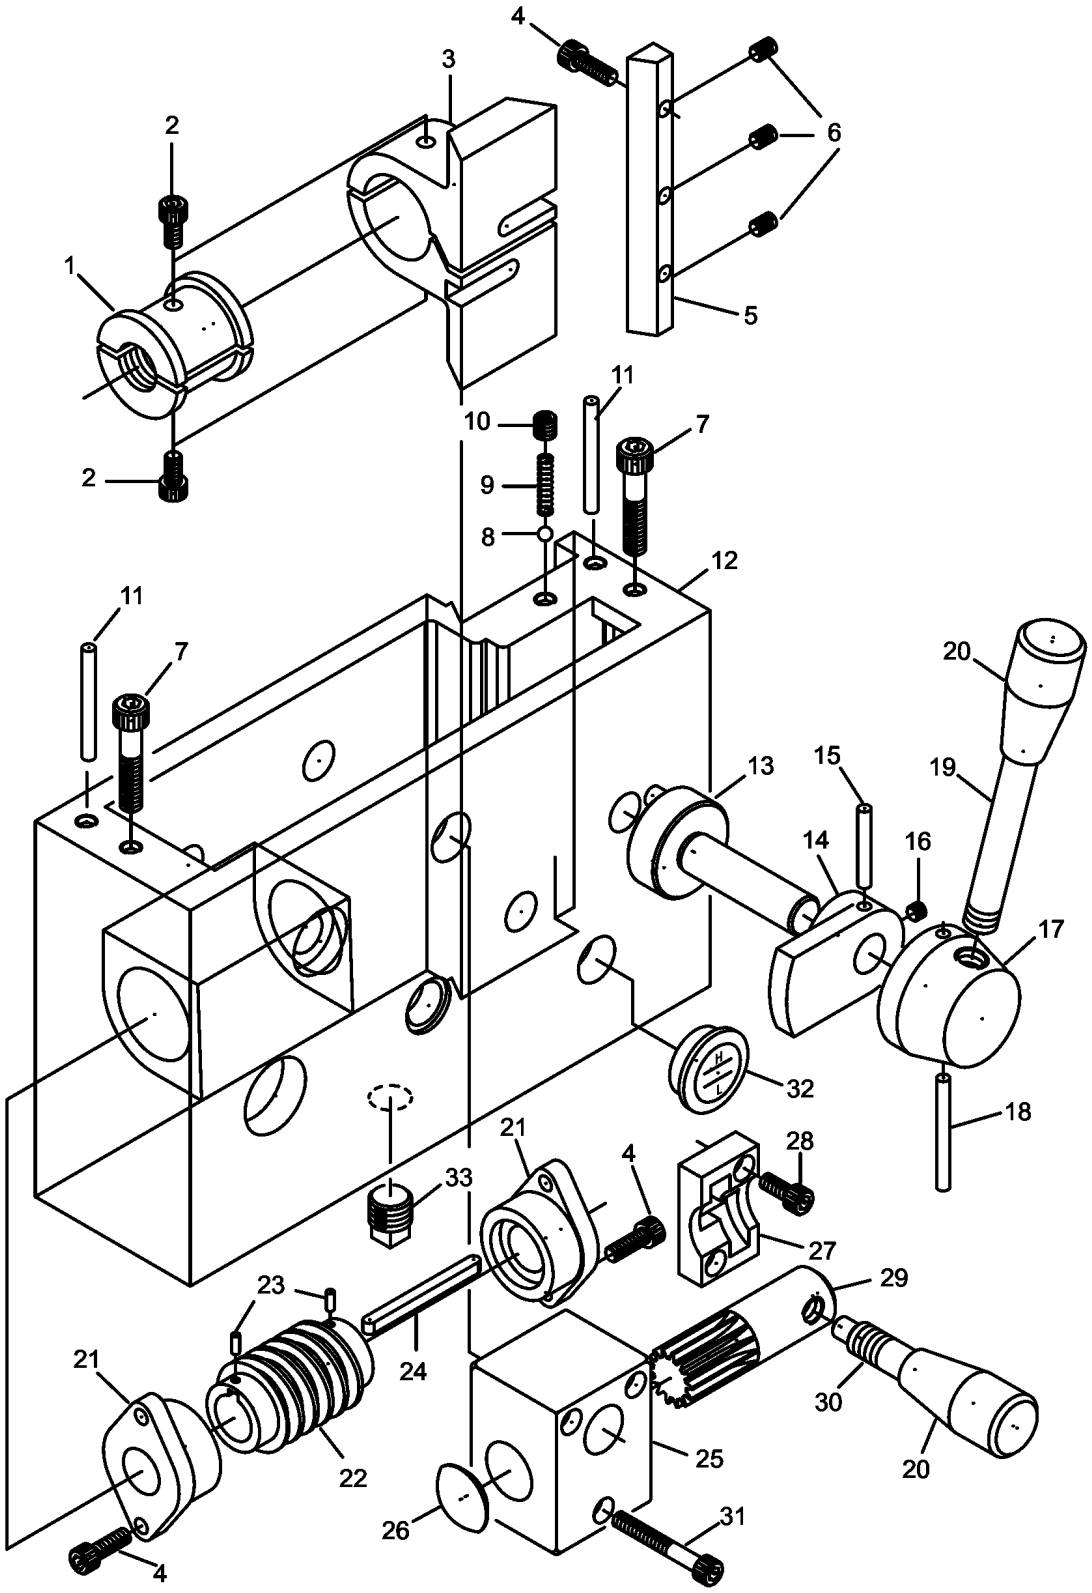


mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram C - APRON ASSEMBLY (2 of 2)

Original JET parts reference | Match model, voltage and serial-number notes

APRON ASSEMBLY

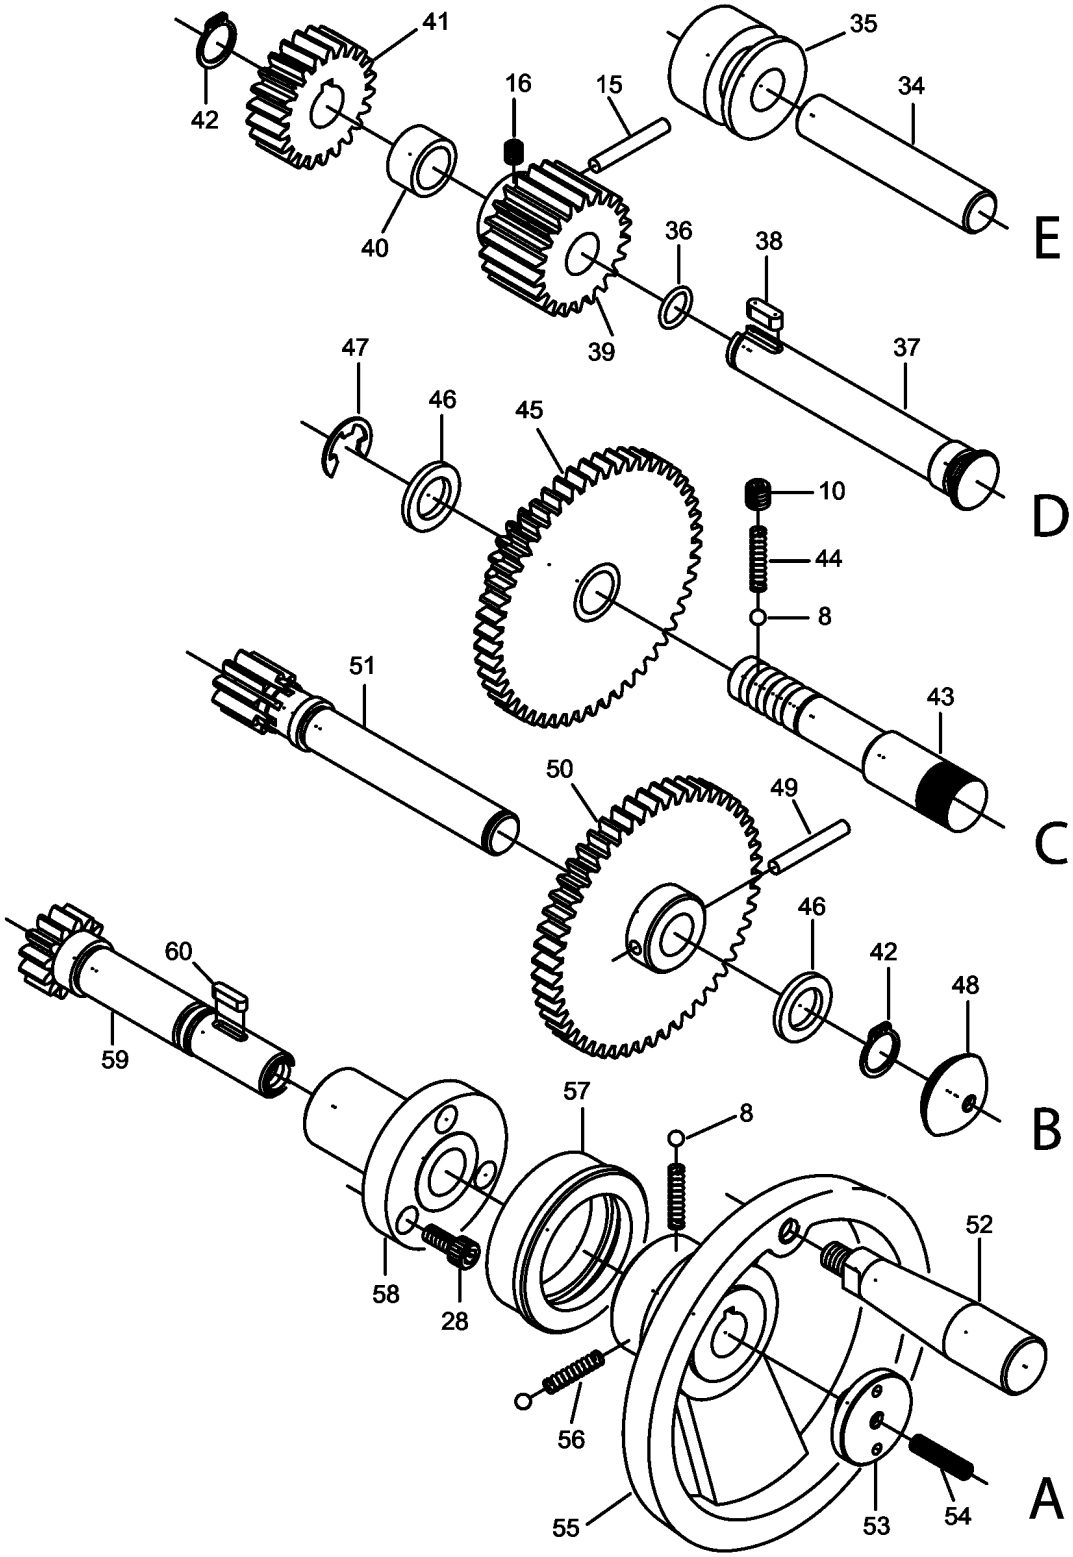

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List C - APRON ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
1	JT9-E1340VS-C01	Half Nut	Ø42*40L 8TPI	1
2	JT9-TS-1503021	Socket Head Cap Screw	M6*10mm	2
3	JT9-E1340VS-C03	Bracket	105L*50W*71H	1
	JT9-E1340VS-C01A	Half Nut Assembly (Includes #1-3)		1
4	CM9-TS-1503041	Socket Head Cap Screw	M6*16mm	6
5	JT9-E1340VS-C05	Gib	13.8*110h*125L	1
6	JT9-TS-1523051	Set Screw	M6*16mm	3
7	JT9-TS-1504081	Socket Head Cap Screw	M8*40mm	2
8	JT9-SB-1/4	Ball Steel	1/4 in. dia.	4
9	JT9-E1340VS-C09	Spring	1/4 in.*50mm.	1
10	CM9-TS-1524011	Set Screw	M8*8mm	2
11	JT9-E1340VS-C11	Taper Pin	#6x50mm	2
12	JT9-E1340VS-C12	Casting	275L*95*172H	1
13	JT9-E1340VS-C13	Shaft	Ø39.9*75L	1
14	JT9-E1340VS-C14	Lever	62L*36W*17H	1
15	JT9-E1340VS-C15	Pin	5*35 mm.	2
16	JT9-TS-1523011	Set Screw	M6*6mm	2
17	JT9-E1340VS-C17	Handle	Ø50*30L Ø16	1
18	JT9-E1340VS-C18	Pin	5*50 mm.	1
19	JT9-E1340VS-C19	Handle	Ø1/2" *107L	1
20	JT9-E1340VS-C20	Handle	3/8 in.	2

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List C - APRON ASSEMBLY (continued)

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
	JT9-E1340VS-C20A	Handle Assy (including #19&20)		1
21	JT9-E1340VS-C21A	Cover	62L*40W*23h Ø19	2
22	JT9-E1340VS-C21A	Worm	Ø37*Ø19.05*60L	1
23	JT9-E1340VS-C21A	Pin	3*8 mm.	2
24	JT9-E1340VS-C24	Key	5*60 mm.	1
25	JT9-E1340VS-C25	Keep Assy.	50*65*45h	1
26	JT9-E1340VS-C26	Plug	Ø28*8W	1
27	JT9-E1340VS-C27	Cam	50*30*12H	1
28	CM9-TS-1503031	Socket Head Cap Screw	M6*12mm	5
29	JT9-E1340VS-C29	Gear Shaft		1
30	JT9-E1340VS-C30	Lever		1
	JT9-E1340VS-C30A	Handle Assy (including #20&30)		1
31	JT9-TS-1503101	Socket Head Cap Screw	M6*45mm	1
32	JT9-E1340VS-C32	Oil Sight	3/4 in. (19mm.)	1
33	JT9-E1340VS-C33	Plug	3/8 G.P.	1
34	JT9-E1340VS-C34	Shaft	Ø16*85L	1
35	JT9-E1340VS-C35	Collar	Ø38*Ø16*30L	1
36	JT9-E1340VS-C36	O-Ring	11*16*2.5 mm.	1
37	JT9-E1340VS-C37	Shaft	Ø22*117L	1
38	JT9-E1340VS-C38	Key	5*15 mm	1
39	JT9-E1340VS-C39	Gear	2M22T	1

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List C - APRON ASSEMBLY (continued)

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
40	JT9-E1340VS-C40	Collar	Ø22*Ø16*12W	1
41	JT9-E1340VS-C41	Gear	Ø48*Ø16*16W M2*22T	1
42	JT9-E1340VS-C42	Circlip	S-16 mm.	2
43	JT9-E1340VS-C43	Shaft	Ø20*128.76L	1
44	JT9-E1340VS-C44	Spring	1/4 in.*30mm.	1
45	JT9-E1340VS-C45	Gear	2M 20T 2M50T	1
46	JT9-E1340VS-C46	Collar	Ø25.4*Ø16*3W	2
47	JT9-E1340VS-C47	Circlip	E-12 mm	1
48	JT9-E1340VS-C48	Plug	Ø31.5*11W	1
49	JT9-E1340VS-C49	Pin	5*30 mm.	1
50	JT9-E1340VS-C50	Gear	2M 52T	1
51	JT9-E1340VS-C51	Rack Pinion	Ø23.5*134L	1
52	**	Handle	Ø22*100L	1
53	JT9-E1340VS-C53	Pulg	Ø35*15L M6	1
54	JT9-TS-1523071	Set Screw	M6*25mm	1
55	JT9-E1340VS-C55	Handwheel	Ø140*68H	1
56	JT9-E1340VS-C56	Spring	1/4 in.*20mm.	2
57	JT9-E1340VS-C57	Index Ring	Ø63*Ø45*20W	1
58	JT9-E1340VS-C58	Keep Assy.	Ø60*Ø18*57L	1
59	JT9-E1340VS-C59	Shaft	Ø31*114L 1/2~20NF	1
60	JT9-E1340VS-C60	Key	4*15 mm	1

** These parts are shown for reference only and are not available for order individually. Non-proprietary parts, such as fasteners, can usually be found at local hardware stores.


mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram D - CARRIAGE ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

CARRIAGE ASSEMBLY

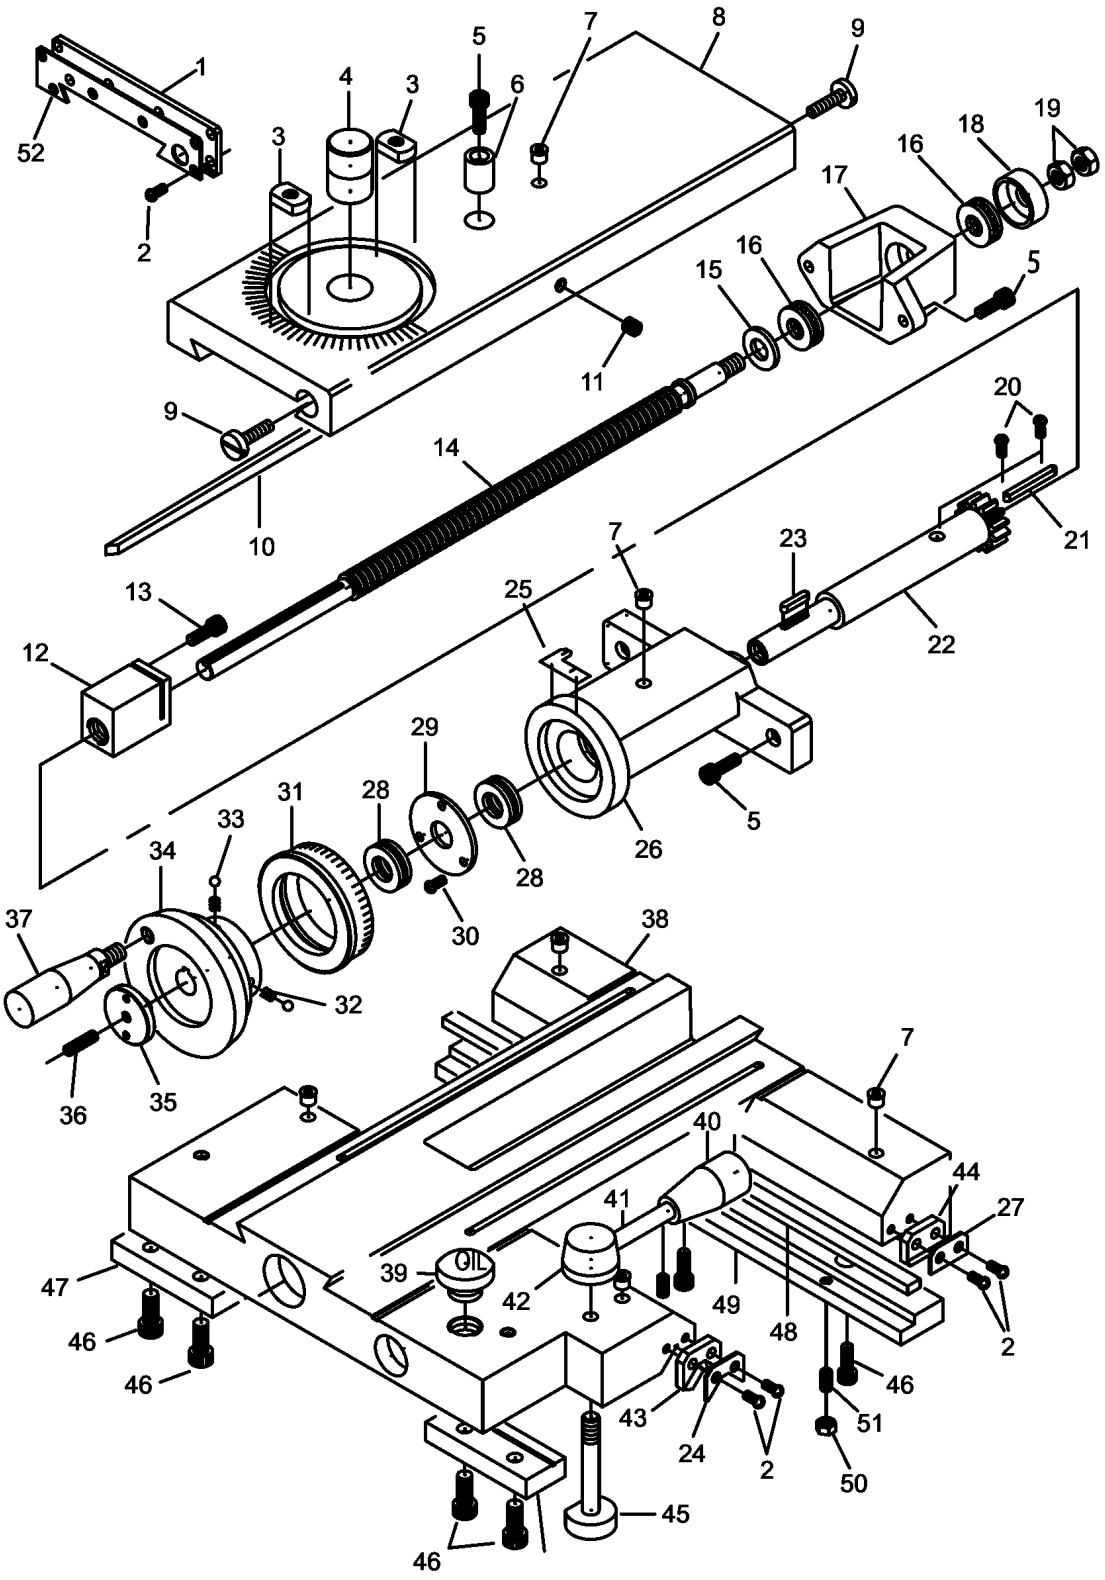

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List D - CARRIAGE ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
1	JT9-E1340VS-D01	Wiper	PVC	1
2	JT9-E1340VS-D02	Screw	3/16*3/8 in.	14
3	JT9-E1340VS-D03	Nut	6.5t*Ø7/8"*14W	2
4	JT9-E1340VS-D04	Pirot	Ø25.4*35L	1
5	JT9-TS-1503051	Socket Head Cap Screw	M6*20mm	4
6	JT9-E1340VS-D06	Collar	Ø16*20L Ø1/4	1
7	JT9-E1340VS-D07	Oil	5/16 in.	6
8	JT9-E1340VS-D08	Cross-Slide	405L*130W*30H	1
8	JT9-E1440VS-D08	Cross-Slide		1
9	JT9-E1340VS-D09	Gib Screw	Ø5/8"*30L	2
10	JT9-E1340VS-D10	Gib	15*23*460	1
11	CM9-TS-1524011	Set Screw	M8*8mm	1
12	ED9-E1340VS-D12A	Nut	45L*25W*32h	1
13	CM9-TS-1503031	Socket Head Cap Screw	M6*12mm	1
14	ED9-E1340VS-D12A	Screw	Ø5/8"*430L 10TPI	1
	ED9-E1340VS-D12A	Nut Assembly (Includes #12-14)		1
15	JT9-E1340VS-D15	Washer	Ø25*1/2"*3T	1
16	JT9-BB-51101	Thrust	NO. 51101	2
17	JT9-E1340VS-D17	Keep Ass'y	260L*35W*20T	1
17	JT9-E1440VS-D17	Keep Ass'y		1
18	JT9-E1340VS-D18	Bearing Cover	Ø31*Ø12*11.5L	1
19	JT9-TS-0561031	Nut	3/8 in.	1
20	JT9-E1340VS-D20	Nail	2 mm.	2
21	JT9-E1340VS-D21	Key	4*40 mm.	1
22	JT9-E1340VS-D22	Gear	Ø32*139L	1
22	JT9-E1440VS-D22	Gear		1
23	JT9-E1340VS-D23	Key	4*20 mm.	1
24	JT9-E1340VS-D24	Wiper		2
25	JT9-E1340VS-D25	Index Plate		1

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List D - CARRIAGE ASSEMBLY (continued)

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
26	JT9-E1340VS-D26	Keep Ass'y		1
26	JT9-E1440VS-D26	Keep Ass'y	Ø70*73L*Ø22	1
27	JT9-E1340VS-D27	Wiper		2
28	CM9-BB-51102	Thrust	NO. 51102	2
29	JT9-E1340VS-D29	Washer	Ø49.5*Ø16*36	1
30	JT9-TS-081F021	Screw	1/4*3/8 in.	3
31	JT9-E1340VS-D31	Index Ring	Ø73*Ø50*19.9L	1
32	JT9-E1340VS-D32	Spring	1/4 in.*20mm.	2
33	**	Steel Ball	1/4 in.	2
34	JT9-E1340VS-D34	Handwheel	Ø90*Ø15*49L	1
35	JT9-E1340VS-D35	Pulg	Ø35*15L M6TAP	1
36	JT9-TS-1523071	Set Screw	M6*25mm	1
37	JT9-E1340VS-D37	Handle	Ø19*80L	1
38	JT9-E1340VS-D38	Saddle Casting	343L*310W*67H	1
39	JT9-E1340VS-D39	Plug	3/4 in. (P.V.C)	1
40	JT9-E1340VS-D40	Handle	3/8 in.	1
	JT9-E1340VS-D40A	Handle Assy (including #40&41)		1
41	JT9-E1340VS-D41	Handle	Ø3/8"*65L	1
42	JT9-E1340VS-D42	Handle	Ø5/4'*22W	1
43	JT9-E1340VS-D43	Wiper	PVC	2
44	JT9-E1340VS-D44	Wiper	PVC	1
45	JT9-E1340VS-D45	Screw	Ø9/8"*75L	1
46	JT9-TS-1504041	Socket Head Cap Screw	M8*20mm	7
47	JT9-E1340VS-D47	Strip	80L*31W*13H	2
48	JT9-E1340VS-D48	Gib	10W*5T*310L	1
49	JT9-E1340VS-D49	Strip	310L33.5W*15H	1
50	CM9-TS-2311061	Nut	M6mm.	3
51	JT9-TS-1523051	Set Screw	M6*16mm	3
52	JT9-E1340VS-D52	Wiper		1


** These parts are shown for reference only and are not available for order individually. Non-proprietary parts, such as fasteners, can usually be found at local hardware stores.

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram E - TOOLPOST ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

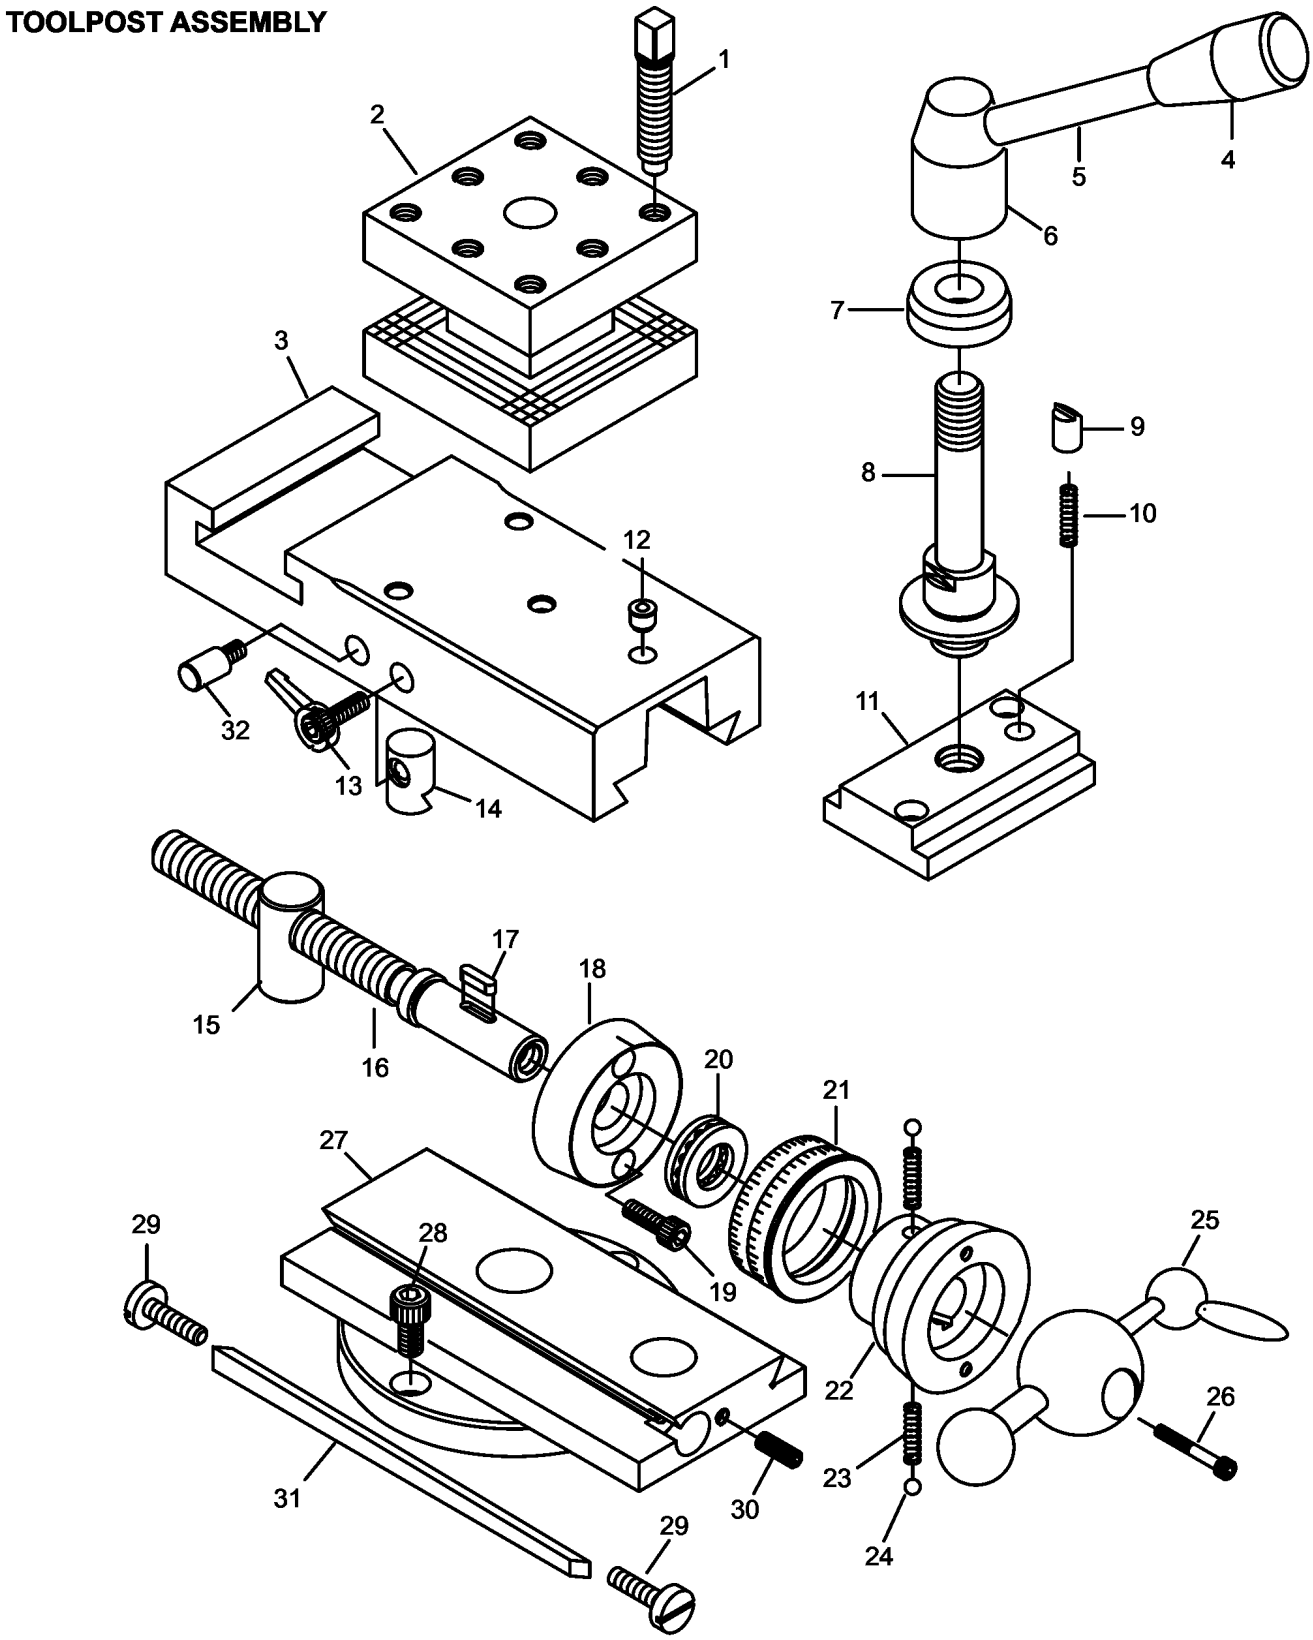

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List E - TOOLPOST ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
1	JT9-E1340VS-E01	Screw	Ø12.7*65L	8
2	JT9-E1340VS-E02	Toolpost	90*90*72H	1
3	JT9-E1340VS-E03	Top Slide	215l*90W*38H	1
	**	Top Slide Assy (including E3 & E11)		1
4	JT9-E1340VS-E04	Handle	3/8 in.	1
	JT9-E1340VS-E04A	Handle Assy (including #4&5)		1
5	JT9-E1340VS-E05	Handle	Ø1/2" *107L	1
6	JT9-E1340VS-E06	Handle	Ø32*48L 5/8"~11NCTAP	1
7	JT9-E1340VS-E07	Washer	Ø35*Ø16*12h	1
8	JT9-E1340VS-E08	Bolt	Ø10*111L	1
9	JT9-E1340VS-E09	Pad	Ø3/5"*15L	1
10	JT9-E1340VS-E10	Spring	3/8in *20mm.	1
11	JT9-E1340VS-E11	Nut	Ø90*50W*18H	1
12	JT9-E1340VS-E12	Oil	5/16 in.	1
13	JT9-E1340VS-E13	Handle		1
14	JT9-E1340VS-E14	Pad	Ø16*24L	1
15	JT9-E1340VS-E15	Nut	Ø20*40L	1
16	JT9-E1340VS-E16	Screw	Ø3/4"*177L 2TPI	1

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List E - TOOLPOST ASSEMBLY (continued)

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
	JT9-E1340VS-E15A	Nut Assembly (Includes #15-16)		1
17	JT9-E1340VS-E17	Key	8*15 mm.	1
18	JT9-E1340VS-E18	Keep Ass'y	Ø57*Ø17*16W	1
19	CM9-TS-1503041	Socket Head Cap Screw	M6*16mm	2
20	JT9-BB-51103	Thrust	NO. 51103	1
21	JT9-E1340VS-E21	Index Ring	Ø54*Ø40*20	1
22	JT9-E1340VS-E22	Handwheel	Ø62*Ø17*42L	1
23	JT9-E1340VS-E23	Spring	1/4 in.*20mm.	2
24	**	Ball Steel	1/4 in. dia.	2
25	JT9-E1340VS-E25	Three Ball Handle		1
26	JT9-TS-1503071	Socket Head Cap Screw	M6*30mm	1
27	JT9-E1340VS-E27	Swiver Slide	35H	1
27	JT9-E1440VS-E27	Swiver Slide	44H	1
28	CM9-TS-1504031	Socket Head Cap Screw	M8*16mm	2
29	JT9-E1340VS-E29	Gib Screw	Ø5/8"*30L	2
30	JT9-TS-1523051	Set Screw	M6*16mm	1
31	JT9-E1340VS-E31	Gib	112*20*225	1
32	JT9-E1340VS-E32	Pin		1


** These parts are shown for reference only and are not available for order individually. Non-proprietary parts, such as fasteners, can usually be found at local hardware stores.

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram F - TAILSTOCK ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

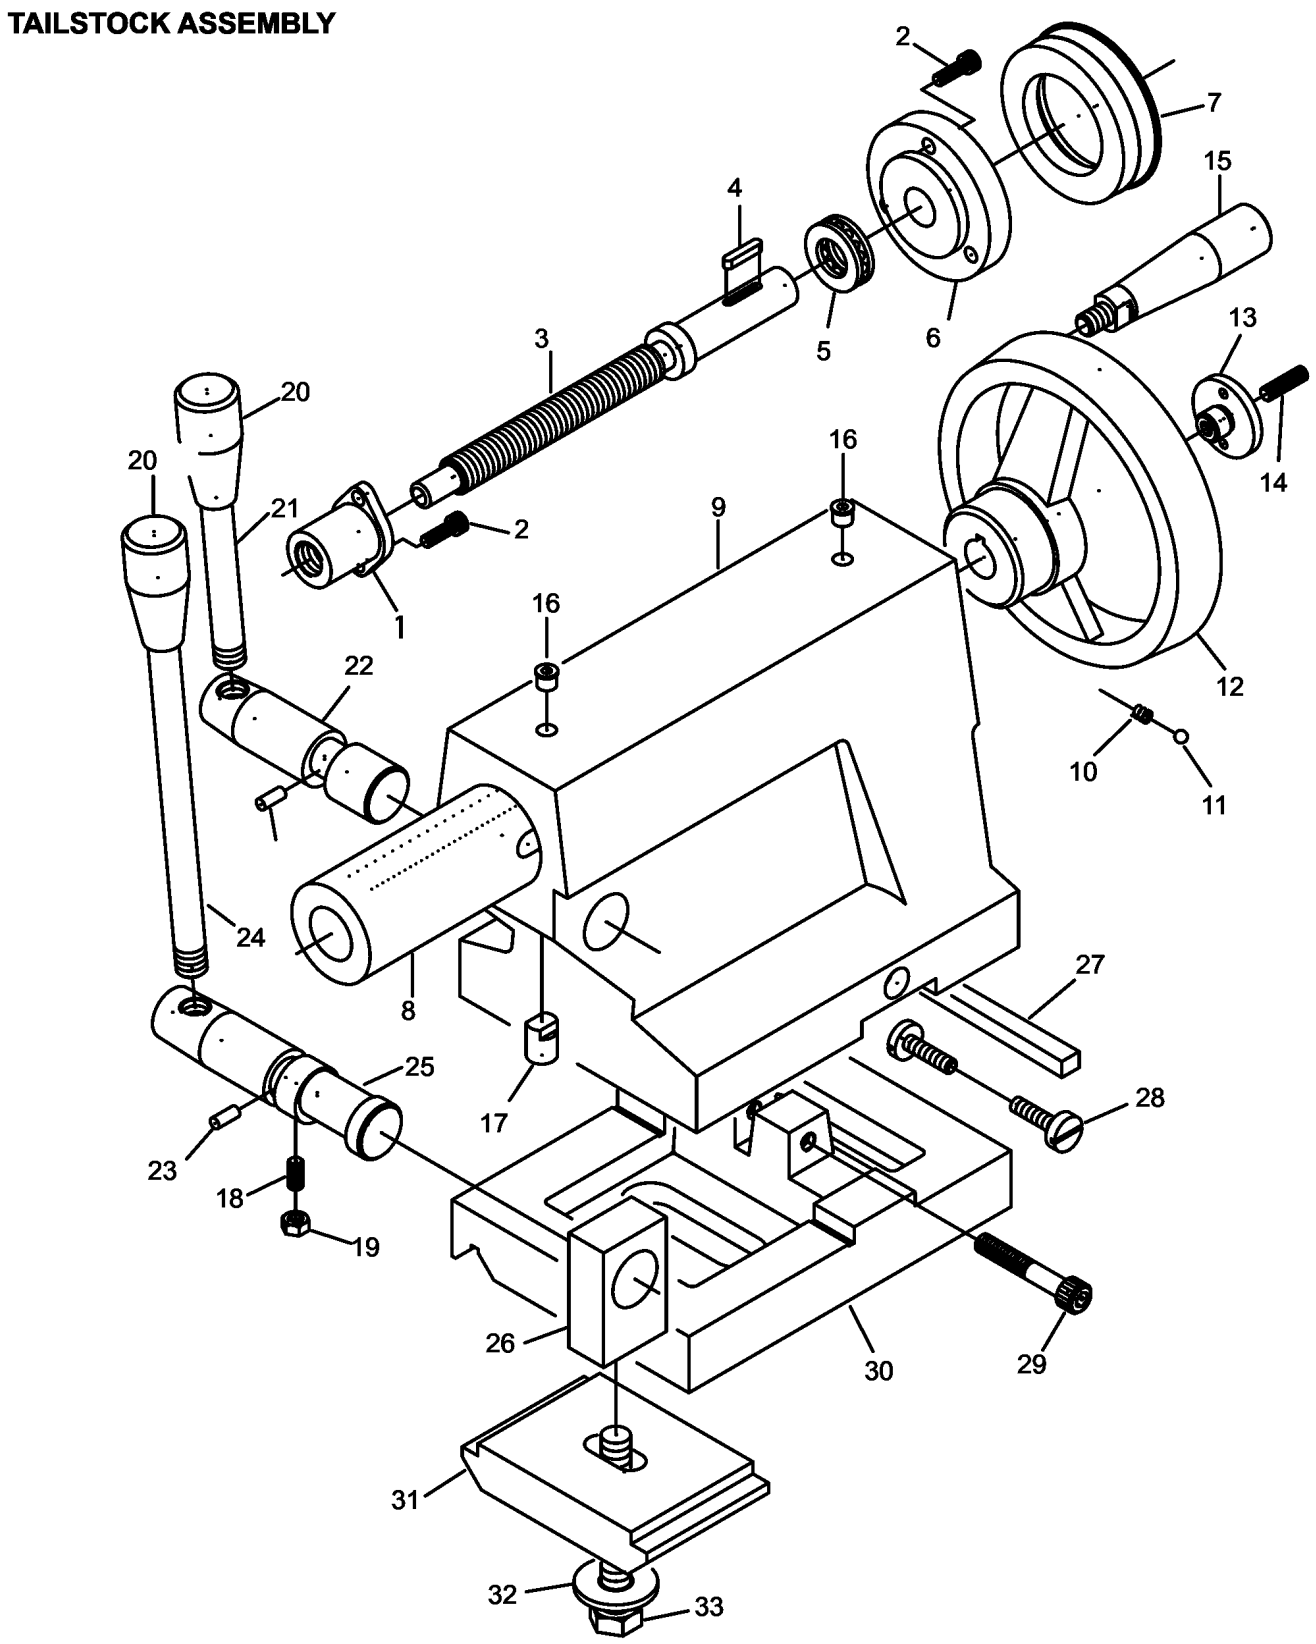

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List F - TAILSTOCK ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
1	JT9-E1340VS-F01A	Nut	43L*30W*33h	1
2	CM9-TS-1503041	Socket Head Cap Screw	M6*16mm	5
3	JT9-E1340VS-F01A	Screw	Ø22*208L 10TPI	1
	JT9-E1340VS-F01A	Nut Assembly (Includes #1-3)		1
4	JT9-E1340VS-F04	Key	4*20 mm.	1
5	JT9-BB-51103	Thrust	NO. 51103	1
6	JT9-E1340VS-F06	Keep	Ø70*Ø17*17W Ø32*9	1
7	JT9-E1340VS-F07	Index Ring	Ø73*Ø45*20W	1
8	JT9-E1340VS-F08	Barrel	Ø45*210L Ø20	1
9	JT9-E1340VS-F09	Casting	230L*136W*174.5H	1
10	JT9-E1340VS-F10	Spring	1/4 in.*20mm.	2
11	**	Ball Steel	1/4 in. dia.	2
12	JT9-E1340VS-F12	Handle	Ø22*100L	2
13	JT9-E1340VS-F13	Pulg	Ø35*15L M6TAP	4
14	JT9-TS-1523071	Set Screw	M6*25mm	1
15	JT9-E1340VS-F15	Handle	Ø140*68h.	1
16	JT9-E1340VS-F16	Oil	5/16 in.	2
17	JT9-E1340VS-F17	Pad	Ø1/2"*16.7L	1

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List F - TAILSTOCK ASSEMBLY (continued)

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
18	JT9-TS-1523051	Set Screw	M6*16mm	2
19	CM9-TS-2311061	Nut	M6	2
20	JT9-E1340VS-F20	Handle	3/8 in.	1
21	JT9-E1340VS-F21	Handle	Ø1/2" *107L	3
	JT9-E1340VS-F21A	Handle Assy (including #20&21)		1
22	JT9-E1340VS-F22	Shaft	Ø25*97L	1
23	JT9-E1340VS-F23	Pin	5*12 mm.	2
24	JT9-E1340VS-F24	Handle	Ø1/2"*190L	1
	JT9-E1340VS-F24A	Handle Assy (including #20&24)		1
25	JT9-E1340VS-F25	Shaft	Ø25*120L	1
26	JT9-E1340VS-F26	Pirot Block	36L*20W*57h	1
27	JT9-E1340VS-F27	Gib	8*10*136	1
28	JT9-E1340VS-F28	Gib Screw	Ø5/8"*30L	2
29	JT9-TS-1504101	Socket Head Cap Screw	M8*50mm	2
30	JT9-E1340VS-F30	Base	185L*136W*53H	1
30	JT9-E1440VS-F30	Base	185L*136W*66H	1
31	JT9-E1340VS-F31	Clamp Plate	106L*70W*22H	1
32	JT9-TS-0680061	Washer	1/2 in.	1
33	JT9-E1340VS-F33	Cap Screw	1/2*2-5/8 in.	1


** These parts are shown for reference only and are not available for order individually. Non-proprietary parts, such as fasteners, can usually be found at local hardware stores.

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram G - BED ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

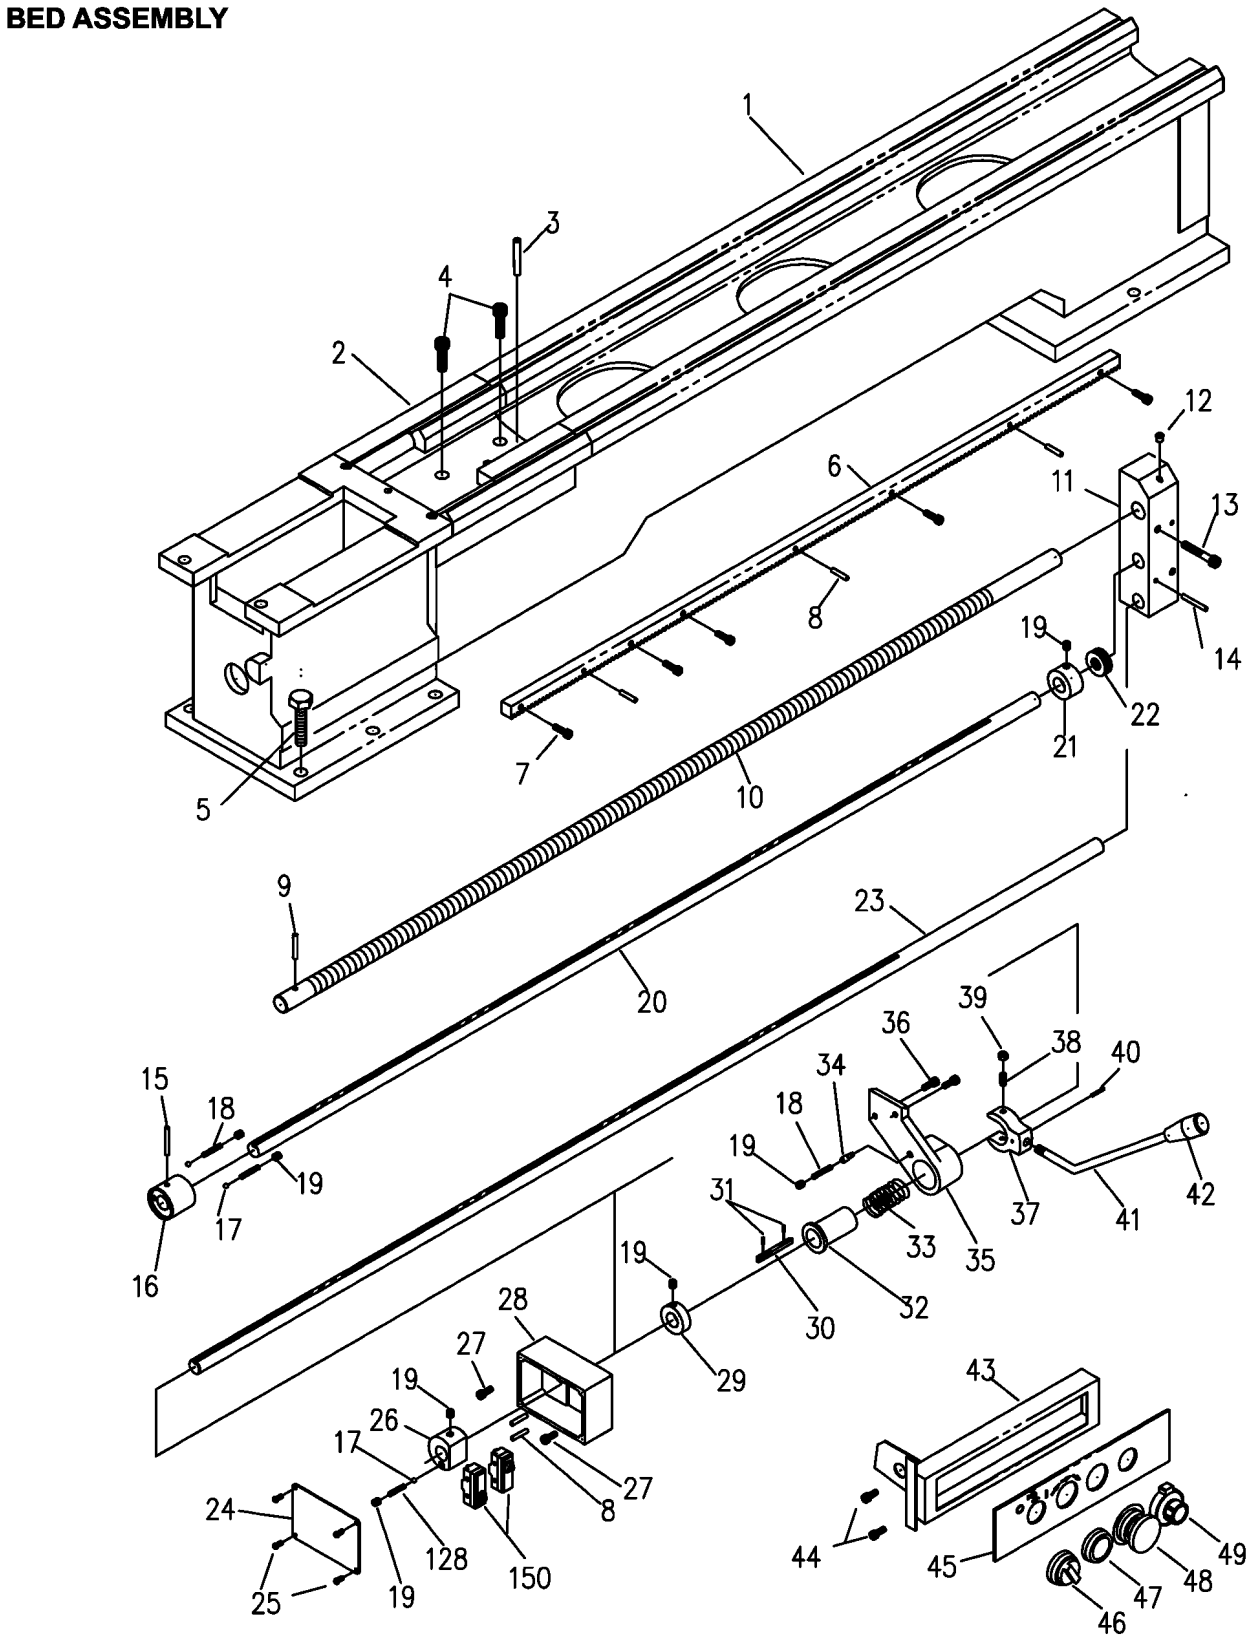

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List G - BED ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
1	JT9-E1340VS-G01	Bed	206W*280.5h*1420L	1
2	JT9-E1340VS-G02	Gap Piece	206W*240L*90.5H	1
3	JT9-E1340VS-G03	Taper Pin	#6x50mm	2
4	JT9-TS-1505051	Socket Head Cap Screw	M10*35mm	4
5	JT9-TS-0070041	Cap Screw	1/2*1-3/4 in.	6
6	JT9-E1340VS-G06	Rack	16*19 1050L	1
7	JT9-TS-1503051	Socket Head Cap Screw	M6*20mm	8
8	JT9-E1340VS-G08	Pin	5*25 mm.	5
9	JT9-E1340VS-G09	Pin	5*35 mm.	3
10	JT1-1321	Leadscrew	Ø7/8" 1338L 8TPI	1
11	JT9-E1340VS-G11	Bracket	50*50*195L	1
12	JT9-E1340VS-G12	Oil	5/16 in.	1
13	JT9-TS-1504101	Socket Head Cap Screw	M8*50mm	2
14	JT9-E1340VS-G14	Pin	5*60 mm	2
15	JT9-E1340VS-G15	Pin	5*40 mm	1
16	JT9-E1340VS-G16	Clutch	Ø42*Ø19*38.4L	1
17	**	Ball Steel	1/4 in. dia.	3
18	JT9-E1340VS-G18	Spring	1/4 in.*35mm.	3
19	CM9-TS-1524011	Set Screw	M8*8mm	7
20	JT9-E1340VS-G20	Feed Shaft	Ø3/4" 1350L	1
21	JT9-E1340VS-G21	Bearing Cover	Ø39*Ø19.05*21W	1
22	JT9-BB-51104	Thrust	NO. 51104	1
23	JT9-E1340VS-G23	Third-Rod Shaft	Ø3/4" 1710L	1
24	JT9-E1340VS-G24	Perspex Cover	114L*80W*1.0T	1
25	JT9-E1340VS-G25	Screw	1/4*3/8 in.	28
26	JT9-E1340VS-G26	Collar	Ø44*Ø19.05*30W	1

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List G - BED ASSEMBLY (continued)

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
27	CM9-TS-1503031	Socket Head Cap Screw	M6*12mm	3
28	JT9-E1340VS-G28	Box	115L*80W*48H	1
29	JT9-E1340VS-G29	Collar	Ø38*Ø19.05*12W	1
30	JT9-E1340VS-G30	Key	5*60 mm.	1
31	JT9-E1340VS-G31	Pin	3*8 mm.	2
32	JT9-E1340VS-G32	Sleeve	Ø38*Ø19.05*60L	1
33	JT9-E1340VS-G33	Spring	5/8in *21mm	1
34	JT9-E1340VS-G34	Pin	Ø6.3*19L	1
35	JT9-E1340VS-G35	Bracket		1
36	CM9-TS-1503041	Socket Head Cap Screw	M6*16mm	4
37	JT9-E1340VS-G37	Fork	Ø51*20	1
38	JT9-TS-1523051	Set Screw	M6*16mm	1
39	CM9-TS-2311061	Nut	M6	1
40	JT9-E1340VS-G40	Pin	3*20 mm	1
41	JT9-E1340VS-G41	Handle	Ø3/8"*220L	1
	JT9-E1340VS-G41A	Handle Assy (including #41&42)		1
42	JT9-E1340VS-G42	Handle	3/8 in.	1
43	JT9-E1340VS-G43	Box		1
44	JT9-E1340VS-G44	Screw	3/16*3/8 in.	2
45	JT9-E1340VS-G45	Electric Plate		1
46	JT9-E1340VS-G46	Coolant Selecting Switch		1
47	JT9-E1340VS-G47	Jogging Push Bottom Switch		1
48	JT9-E1340VS-G48	Emergency Stop Switch		1
49	JT9-E1340VS-G49	Variable Speed Selector		1
128	JT9-E1340VS-G128	Spring	1/4 in.*30mm.	1
150	JT9-EBL1236VS-G40	Limit Switch		2

** These parts are shown for reference only and are not available for order individually. Non-proprietary parts, such as fasteners, can usually be found at local hardware stores.


mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram H - CABINET AND PANEL ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

CABINET AND PANEL ASSEMBLY

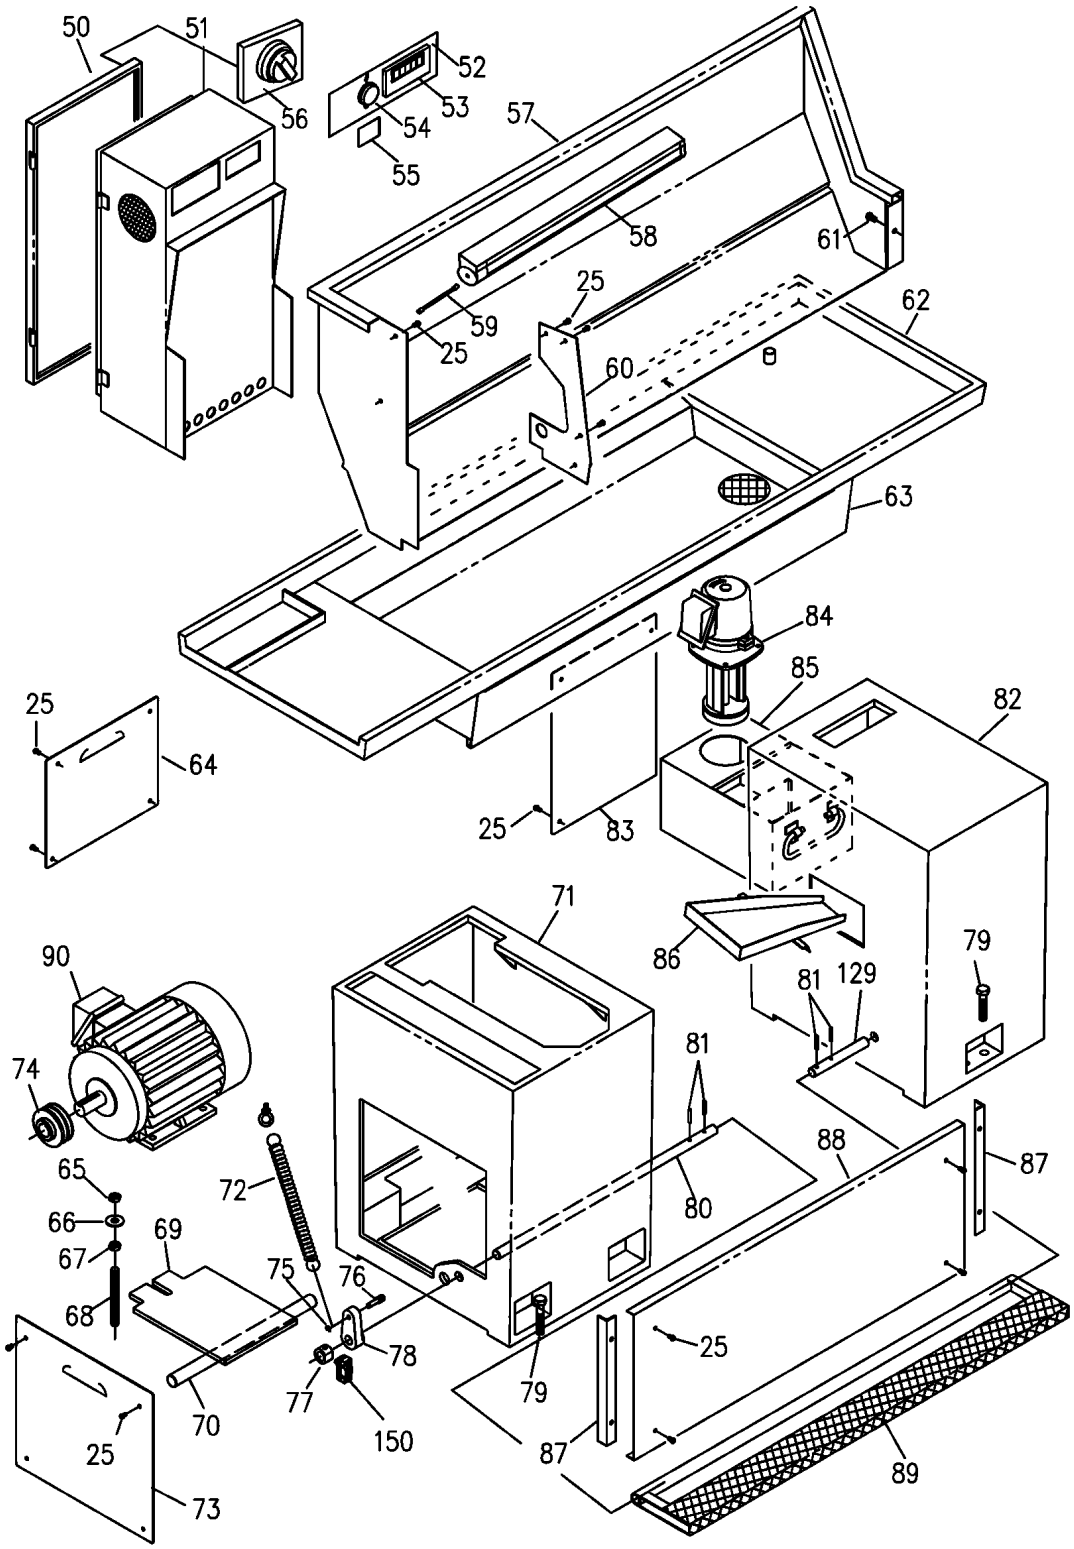

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List H - CABINET AND PANEL ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
50	JT9-E1340VS-G50	Electric Box Door		1
51	JT9-E1340VS-G51	Electric Box		1
52	JT9-E1340VS-G52	Electric Plate		1
53	JT9-E1340VS-G53	RPM Speed Meter		1
54	JT9-E1340VS-G54	Pilot Light		1
55	JT9-E1340VS-G55	Warning Plate		1
56	JT9-E1340VS-G56	Power Switch		1
57	JT9-E1340VS-G57	Splash Guard		1
58	JT9-E1340VS-G58	Work Lamp	AC24V 9W 0.5m/500Lux	1
59	JT9-E1340VS-G59	Pipe	115mm	1
60	JT9-E1340VS-G60	Guard		1
61	JT9-TS-0207041	Cap Screw	1/4*3/4in.	1
62	JT9-E1340VS-G62	Tray		1
63	JT9-E1340VS-G63	Chip Tray		1
64	JT9-E1340VS-G64	Cover		1
65	JT9-TS-0561031	Nut	3/8 in.	3
66	JT9-TS-0680061	Washer	1/2 in.	1
67	JT9-JWS25-202	Nut	1/2 in.	3
68	JT9-E1340VS-G68	Screw		1
69	JT9-E1340VS-G69	Platform		1
70	JT9-E1340VS-G70	Shaft		1
71	JT9-E1340VS-G71	Stand		1

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List H - CABINET AND PANEL ASSEMBLY (continued)

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
72	JT9-E1340VS-G72	Spring		1
73	JT9-E1340VS-G73	Cover		1
74	JT9-E1340VS-G74	Pulley		1
75	JT9-E1340VS-G75	Circlip	E-6 mm.	1
76	JT9-E1340VS-G76	Fulcrum		1
77	JT9-E1340VS-G77	Collar		1
78	JT9-E1340VS-G78	Lever		1
79	JT9-TS-0100041	Cap Screw	1/2*1-1/4 in.	6
80	JT9-E1340VS-G80	Shaft		1
81	JT9-E1340VS-G81	Pin	5*30 mm.	4
82	JT9-E1340VS-G82	Stand		1
83	JT9-E1340VS-G83	Cover		1
84	JT9-E1340VS-G84	Pump		1
85	JT9-E1340VS-G85	Tank		1
86	JT9-E1340VS-G86	Tray		1
87	JT9-E1340VS-G87	Bracket		2
88	JT9-E1340VS-G88	Front Plate		1
89	JT9-E1340VS-G89	Pedal		1
90	**	Main Motor	3HP 60HZ 220/440V	1
129	JT9-E1340VS-G129	Shaft		1
150	JT9-EBL1236VS-G40	Limit Switch		1
	JT9-E1340VS-GA76	Driver Belt (not shown)	A76	2

** These parts are shown for reference only and are not available for order individually. Non-proprietary parts, such as fasteners, can usually be found at local hardware stores.


mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram I - END GEAR ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

END GEAR ASSEMBLY

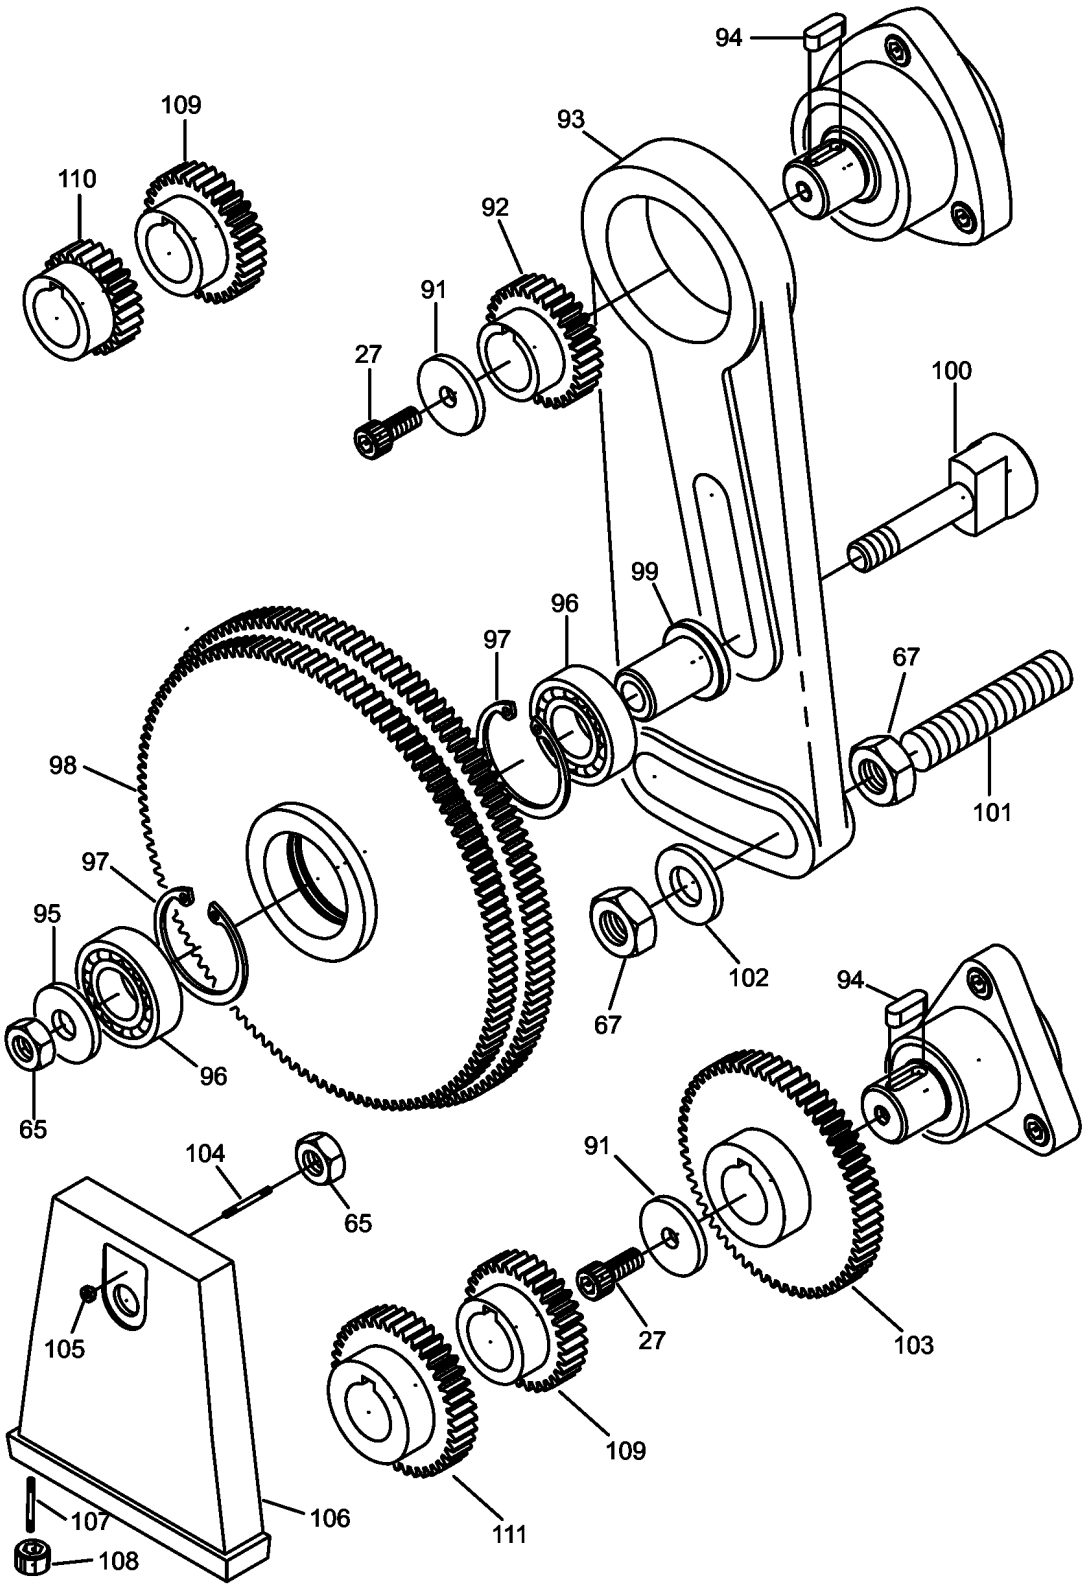

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List I - END GEAR ASSEMBLY


Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
27	CM9-TS-1503031	Socket Head Cap Screw	M6*12mm	2
65	JT9-TS-0561031	Nut	3/8 in.	2
67	JT9-JWS25-202	Nut	1/2 in.	2
91	JT9-E1340VS-G91	Washer	Ø25*Ø1/4"*3t	2
92	JT9-E1340VS-G92	Gear	1.25M 30T	1
93	JT9-E1340VS-G93	Swing Frame		1
94	JT9-E1340VS-G94	Key	5*15 mm.	2
95	JT9-E1340VS-G95	Washer	Ø25*Ø3/5"*5t	1
96	CM9-BB-6003Z	Bearing	NO. 6003Z	2
97	JT9-E1340VS-G97	Circlip	R-35 mm.	2
98	**	Gear	1.25M 120T/127T	1
99	JT9-E1340VS-G99	Shaft Collar	Ø25*Ø3/8"*29L	1
100	JT9-E1340VS-G100	Shaft	Ø25*65L	1
101	JT9-E1340VS-G101	Shaft		1
102	JT9-E1340VS-G102	Washer	Ø25*1/2"*3t	1
103	JT9-E1340VS-G103	Gear	1.25M 60T	1
104	JT9-E1340VS-G104	Stud	Ø3/8"*105L	1
105	JT9-E1340VS-G105	Nut	Ø*16W 3/8~16NC	1
106	JT9-E1340VS-G106	End Cover		1
106	JT9-E1440VS-G106	End Cover		1
107	JT9-E1340VS-G107	Cap Screw	1/4*1-1/4 in.	1
108	JT9-E1340VS-G108	Nut	1/4 in.	1
109	JT9-E1340VS-G109	Gear	1.25M 50T	2
110	JT9-E1340VS-G110	Gear	1.25M 45T	1
111	JT9-E1340VS-G111	Gear	1.25M 40T	2

** These parts are shown for reference only and are not available for order individually. Non-proprietary parts, such as fasteners, can usually be found at local hardware stores.

mmToolParts
Big Time Experience. Small Town Service. .com

CHUCK SAFETY GUARD ASSEMBLY

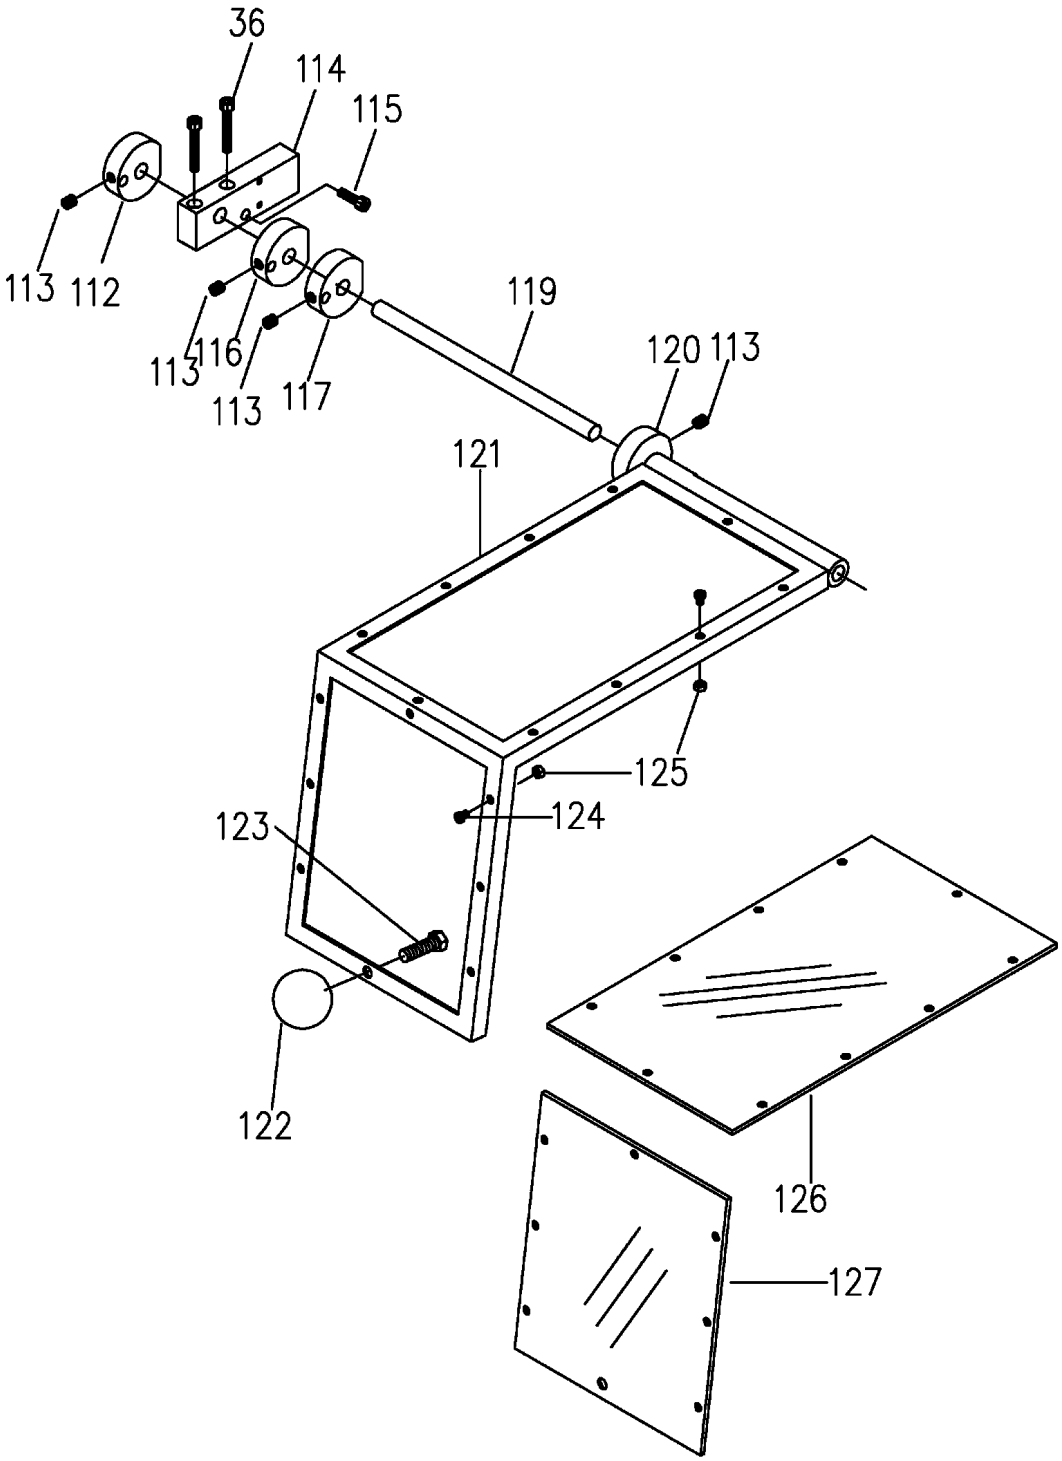

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List J - CHUCK SAFETY GUARD ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
36	CM9-TS-1503041	Socket Head Cap Screw	M6*16mm	2
112	JT9-E1340VS-G112	Cam		1
113	JT9-TS-2276081	Set Screw	M6*8mm	3
114	JT9-E1340VS-G114	Keep Ass'y		1
115	JT9-TS-1503021	Socket Head Cap Screw	M6×10mm	1
116	JT9-E1340VS-G116	Collar		1
117	JT9-E1340VS-G117	Cam		1
119	JT9-E1340VS-G119	Shaft		1
120	JT9-E1340VS-G120	Collar		1
121	JT9-E1340VS-G121	Chuck Guard		1
	JT9-E1340VS-CSGA	Chuck Safety Guard ass'y w/ limit switch	(option)	1
122	JT9-E1340VS-G122	Handle	PVC	1
123	JT9-TS-1505031	Socket Head Cap Screw	M10×25mm	1
124	JT9-E1340VS-G124	Screw	3/16×1/4 in	18
125	JT9-E1340VS-G125	Nut	3/16 in	18
126	JT9-E1340VS-G126	Window	3Tx193x343mm	1
127	JT9-E1340VS-G127	Window	3Tx193x230mm	1


mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram K - COOLANT PUMP ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

COOLANT PUMP ASSEMBLY

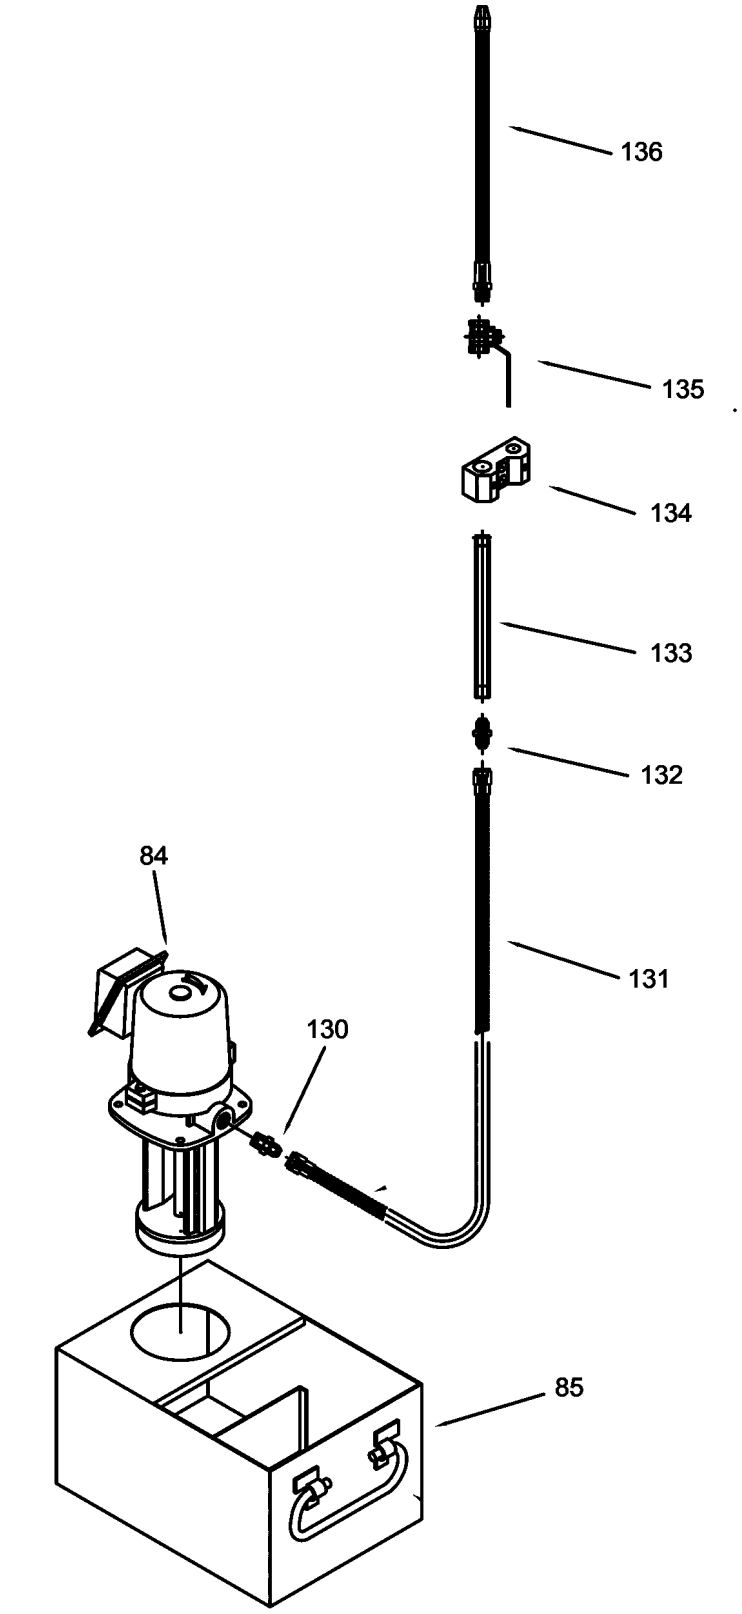

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030


Parts List K - COOLANT PUMP ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
84	JT9-E1340VS-G84	Pump		1
130	JT9-E1340VS-G130	Nipple		1
131	JT9-E1340VS-G131	Flexible Hose		1
132	JT9-E1340VS-G132	Nipple		1
133	JT9-E1340VS-G133	Tube		1
134	JT9-E1340VS-G134	Bracket		1
135	JT9-E1340VS-G135	Value Gate		1
136	JT9-E1340VS-G136	Spraying Pipe		1

mmToolParts
Big Time Experience. Small Town Service. .com

DIAL INDICATOR ASSEMBLY

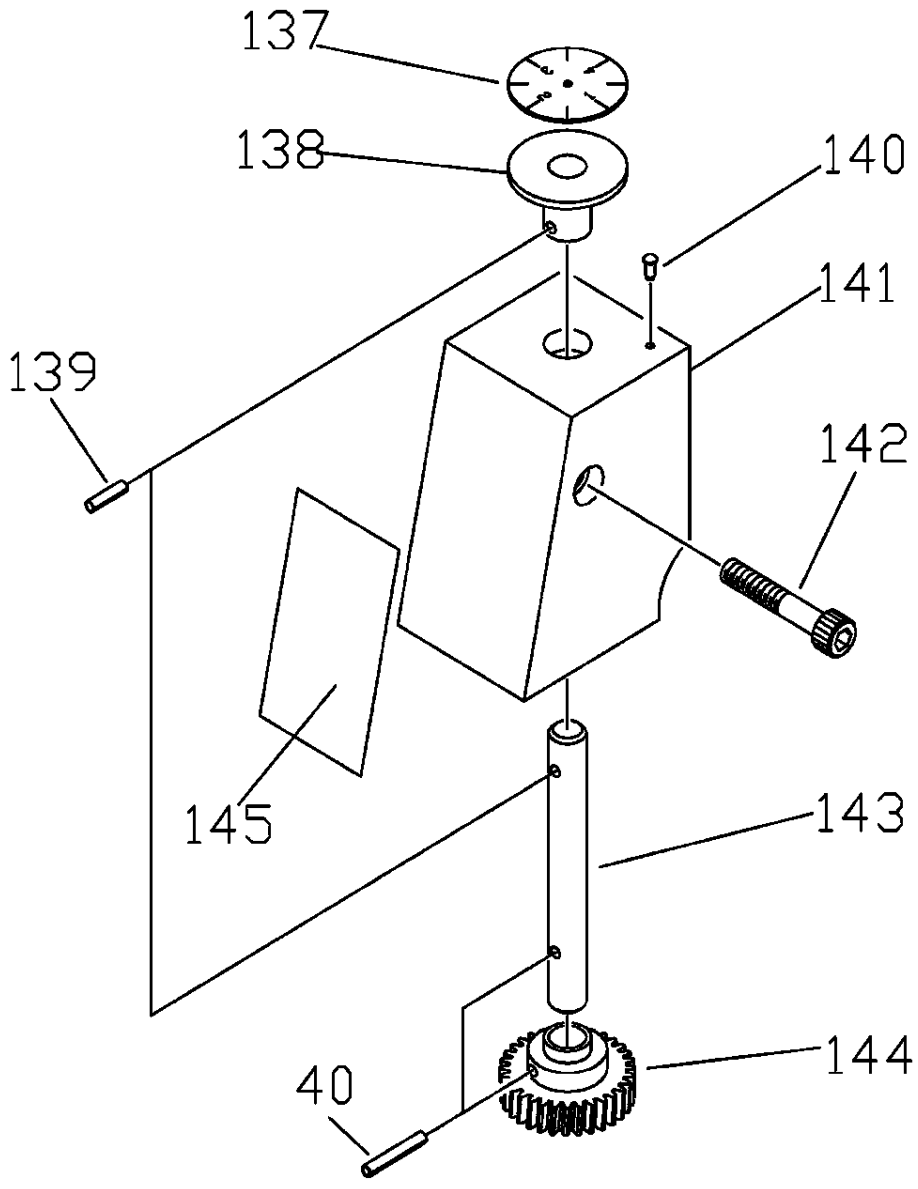

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030


Parts List L - DIAL INDICATOR ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
40	JT9-E1340VS-G40	Pin	3*20 mm.	1
137	JT9-E1340VS-G137	Plate		1
138	JT9-E1340VS-G138	Dog	Ø60*Ø19.05*15W	1
139	JT9-E1340VS-G139	Pin	3*12 mm.	1
140	JT9-E1340VS-G140	Nail	2 mm.	1
141	JT9-E1340VS-G141	Guard	75*59*45	1
142	CM9-TS-1503111	Socket Head Cap Screw	M6*50mm	1
143	JT9-E1340VS-G143	Shaft	Ø9.5*81L	1
144	JT9-E1340VS-G144	Gear	Ø34Ø9.5*17L	1
145	JT9-E1340VS-TP	Threading Plate		1

mmToolParts
Big Time Experience. Small Town Service. .com

CHUCK ASSEMBLY & PARTS LIST

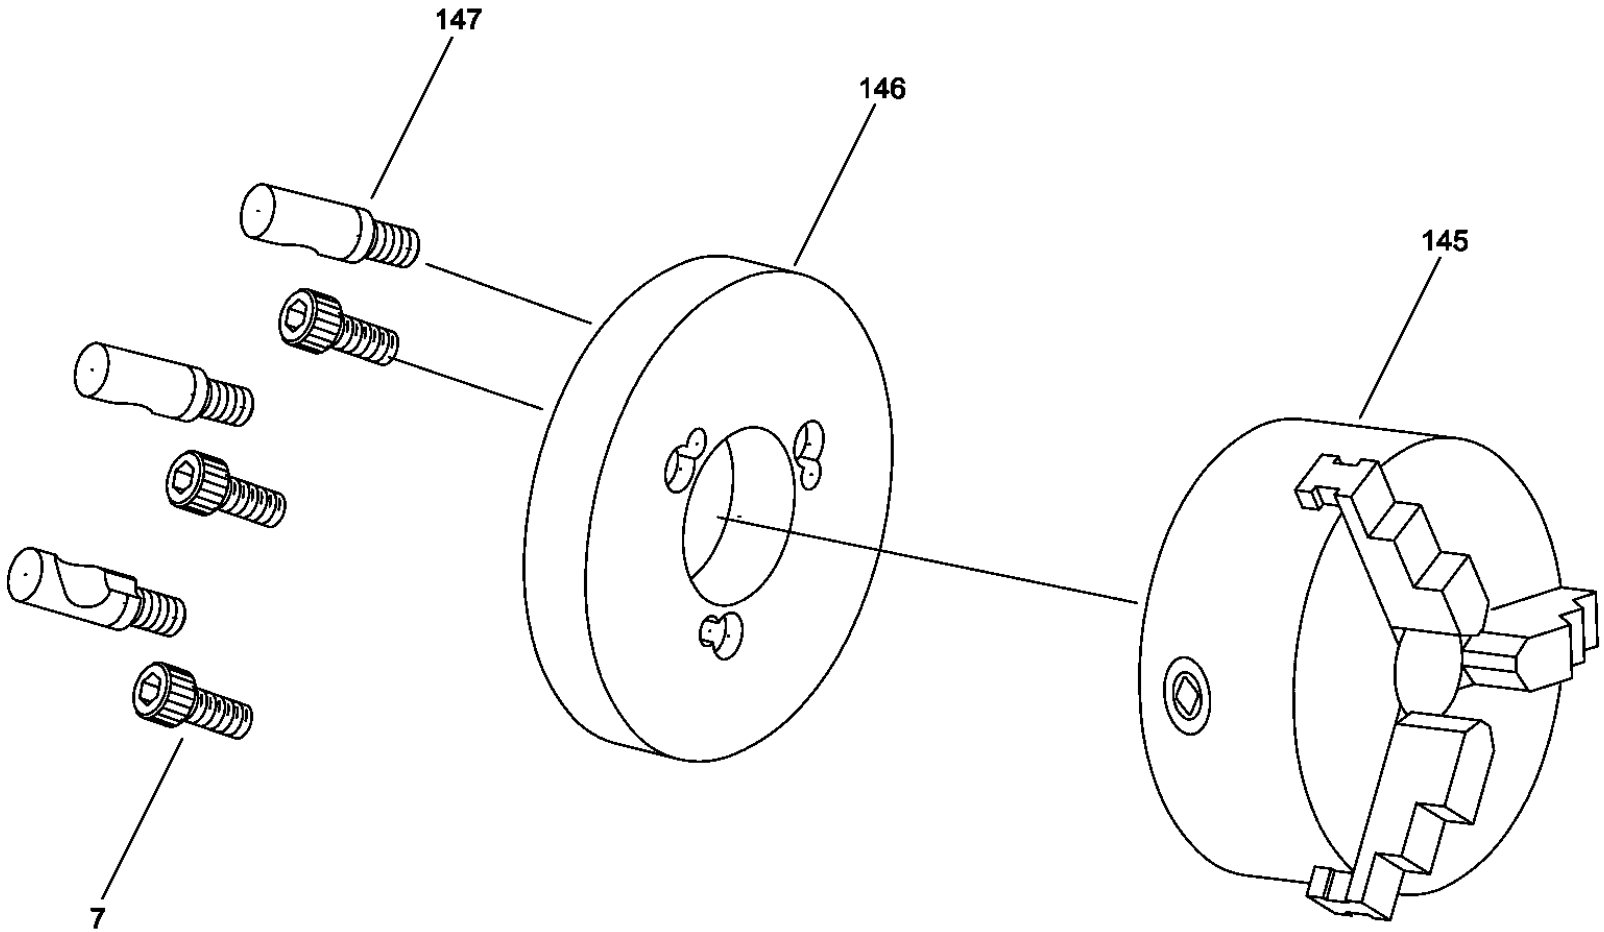

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030


Parts List M - CHUCK ASSEMBLY &

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
7	JT9-TS-1503051	Socket Head Cap Screw	M6*20mm	3
145	JT9-E1340VS-SK6	Chuck	6"	1
146	JT9-E1340VS-G146	Backplate	6"	1
147	JT9-E1340VS-G147	Stud	D1-4	3
1	JT9-TS-1504111	Socket Head Cap Screw M8x55mm	2	
2	JT9-EVS1440B-CKB	Chuck Key Bracket	1	

mmToolParts
Big Time Experience. Small Town Service. .com

FACE PLATE & PARTS LIST

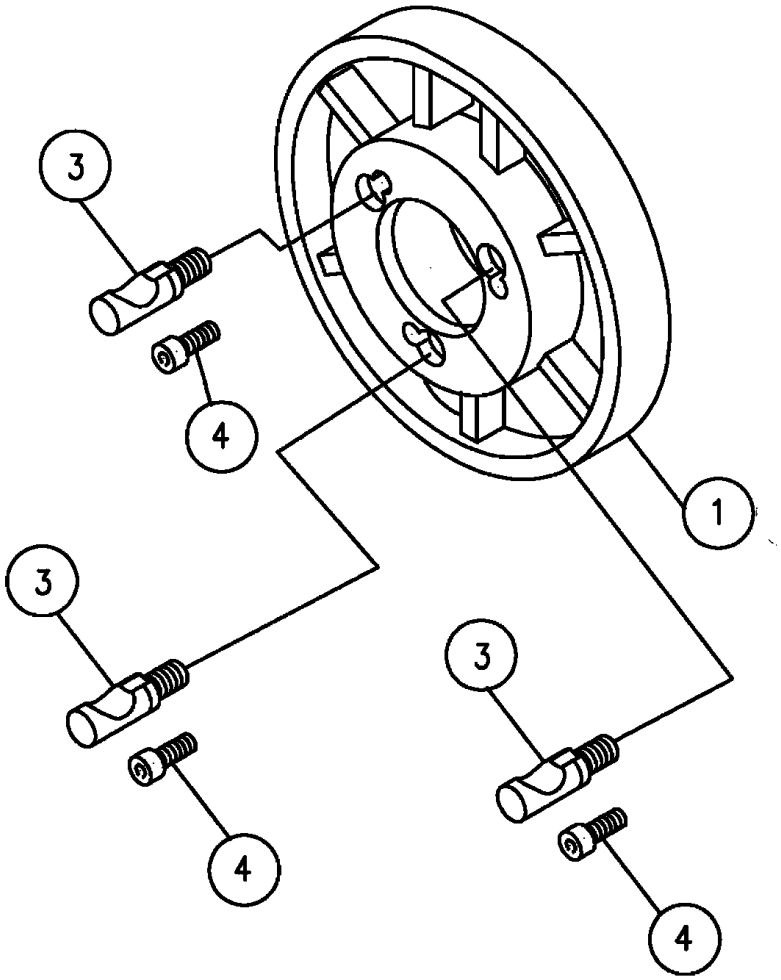

JET E-1440VS | Stock 892030

Parts List N - FACE PLATE &

Original JET parts reference | Match model, voltage and serial-number notes


Ref.	Part number	Description	Size	Qty.
1	JT9-E1440VS-FP02	Face Plate 12”	Ø300x40H	1
3	JT9-EBL1236VS-G137	Stud	D1-4	3
4	JT9-TS-1503051	Socket Head Cap Screw	M6×20mm	3

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram O - CONTROL PLATE ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

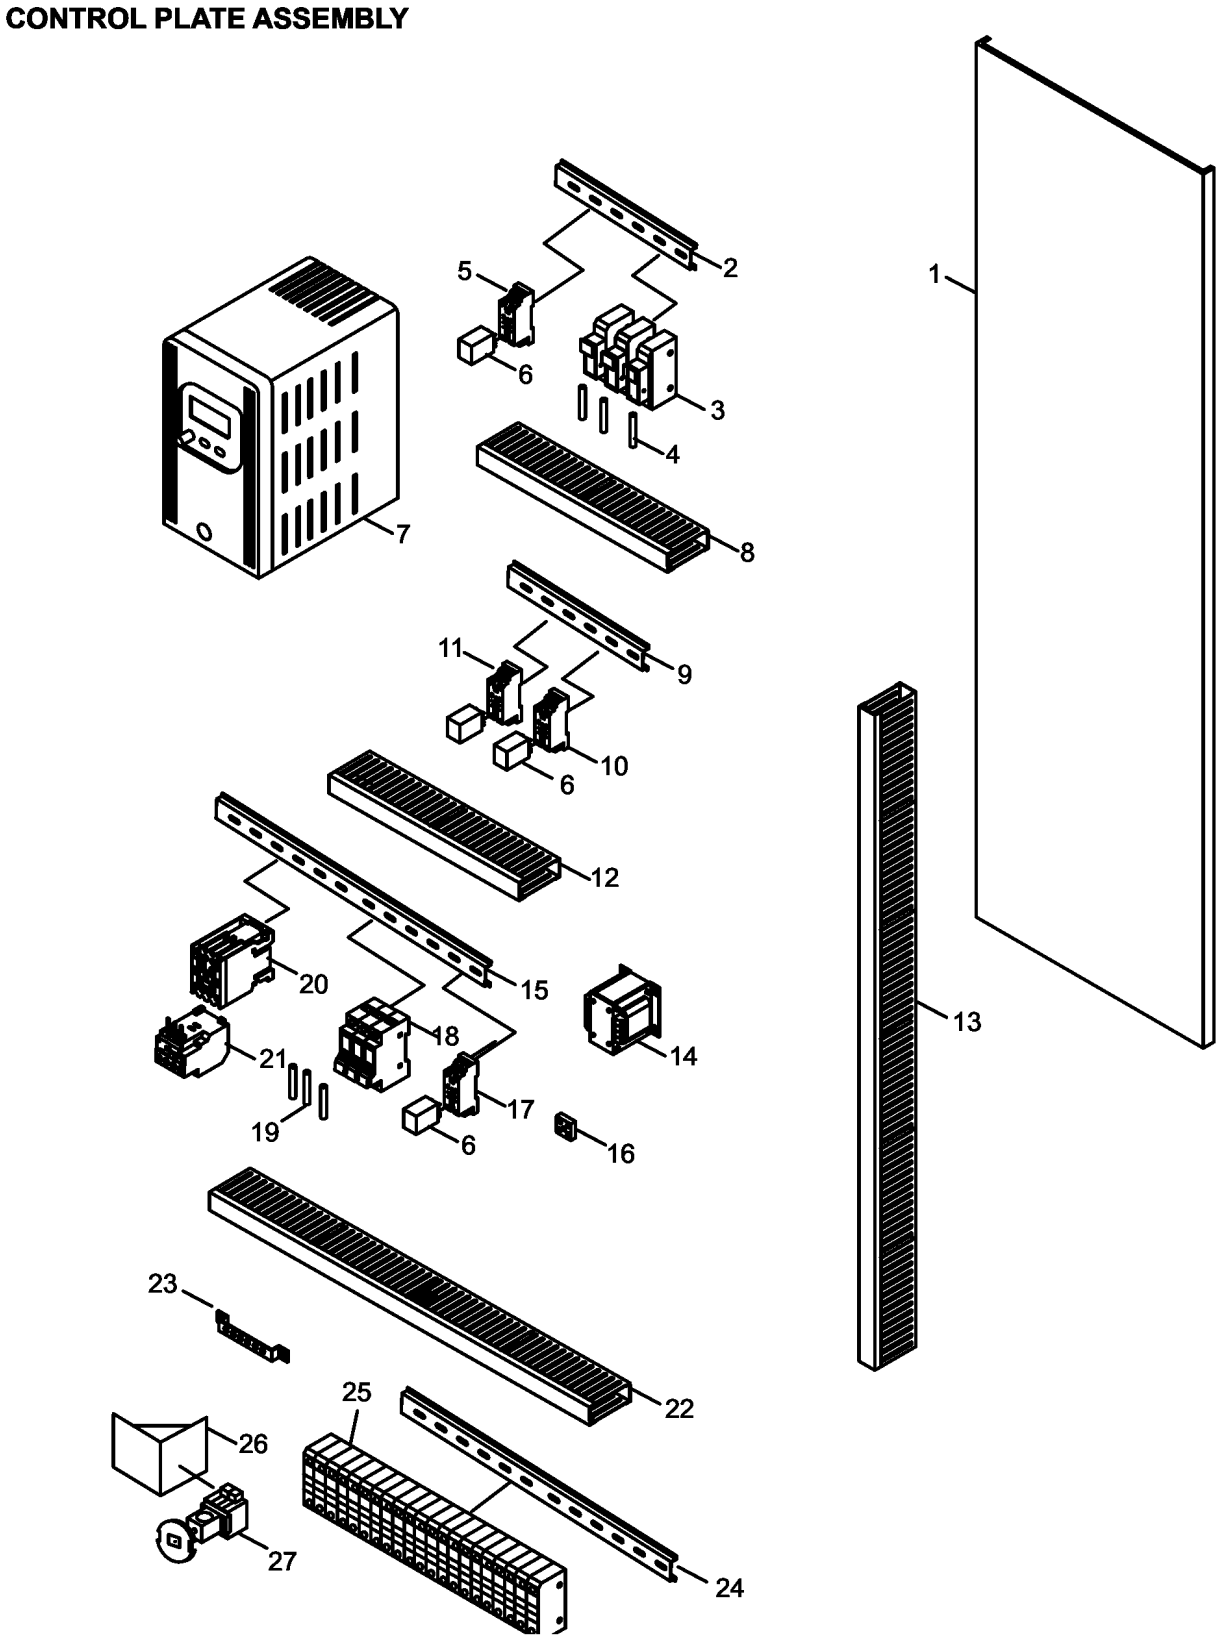

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List O - CONTROL PLATE ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
1	JT9-E1340VS-H01	Plate		1
2	JT9-E1340VS-H02	Track		1
3	JT9-E1340VS-H03	Fuse Box		4
4	JT9-E1340VS-H04	Fuse	5A	4
5	JT9-E1340VS-H05	Relay Socket	for Magnetic brake	1
6	JT9-E1340VS-H06	Relay	MY4N-J AC24V	4
7	**	Inverter	MS300 5HP/240V/3PH	1
8	JT9-E1340VS-H08	Trunking		1
9	JT9-E1340VS-H09	Track		1
10	JT9-E1340VS-H10	Relay Socket		1
11	JT9-E1340VS-H11	Relay Socket		1
12	JT9-E1340VS-H12	Trunking		1
13	JT9-E1340VS-H13	Trunking		1
14	JT9-E1340VS-H14	Control Circuit Transformer	120VC AC24V(5A)	1
15	JT9-E1340VS-H15	Track		1
16	**	Bridge Rectifier		1
17	JT9-E1340VS-H17	Relay Socket		1
18	JT9-E1340VS-H18	Fuse Boxes		1
19	JT9-E1340VS-H19	Fuse	30A	3
20	JT9-E1340VS-H20	Magnetic Contactor	CU-11 AC24V (3A1B)	1
21	JT9-E1340VS-H21	Thermal Overload Relay	RHU-10K1 0.45~0.63A	1
22	JT9-E1340VS-H22	Trunking		1
23	JT9-E1340VS-H23	Earthing Terminal Blocks		1
24	JT9-E1340VS-H24	Track		1
25	JT9-E1340VS-H25	Terminal Blocks		1
26	JT9-E1340VS-H26	Base		1
27	JT9-E1340VS-H27	Main Power Switch	690VAC 25A	1

** These parts are shown for reference only and are not available for order individually. Non-proprietary parts, such as fasteners, can usually be found at local hardware stores.


mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram P - TAPER ATTACHMENT ASSEMBLY (OPTIONAL)

Original JET parts reference | Match model, voltage and serial-number notes

TAPER ATTACHMENT ASSEMBLY (OPTIONAL)

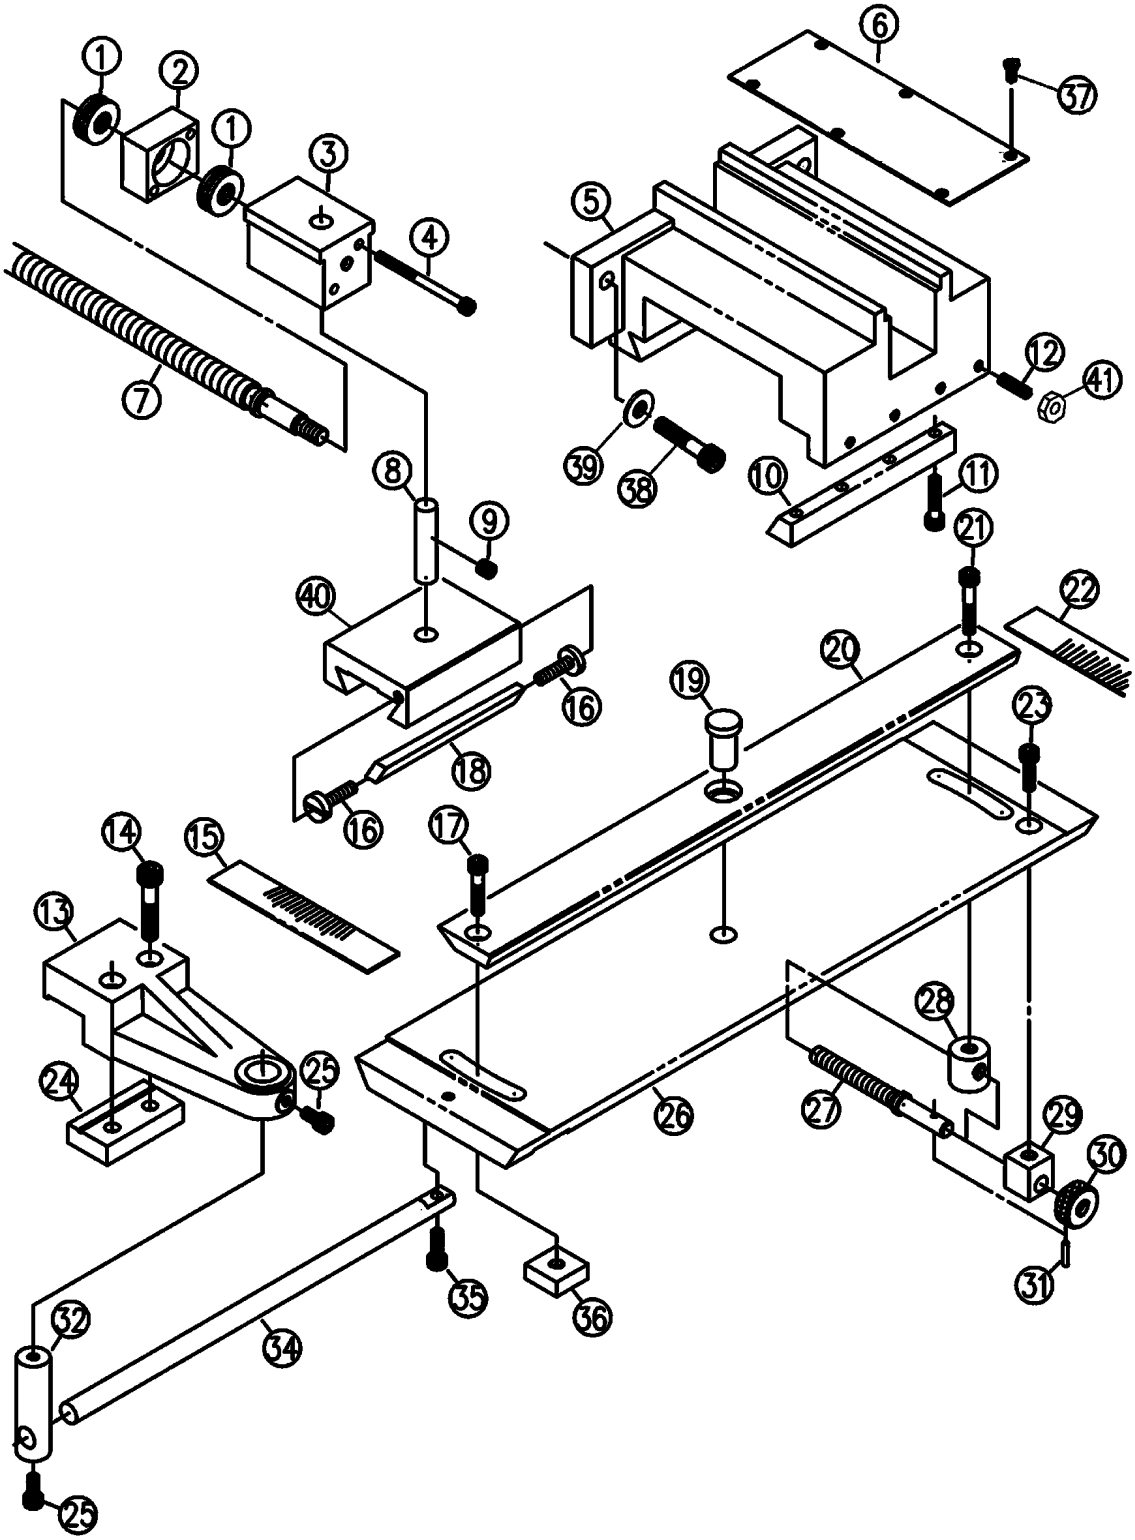

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List P - TAPER ATTACHMENT ASSEMBLY (OPTIONAL)

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
1	JT9-BB-51101	Thrust Bearing	51101	2
2	JT9-E1440VS-J02	Feed Block	52x20x35	1
3	**	Yoke	60x42x41.5	1
4	JT9-E1440VS-J04	Socket Head Cap Screw	M5x65MM	2
5	**	Base	175x180x85	1
6	**	Cover	170x63x1.2	1
7	**	Lead Screw	Ø5/8"x405L	1
8	**	Shaft	Ø12x50L	1
9	CM9-TS-1524011	Set Screw	M8x8mm	1
10	**	Gib	130x18.86(10.2)x15	1
11	CM9-TS-1503061	Socket Head Cap Screw	M6x25mm	4
12	JT9-TS-1523061	Set Screw	M6x20mm	4
13	JT9-E1440VS-J13	Bracket	159x60x40	1
14	JT9-TS-1504081	Socket Head Cap Screw	M8x40mm	1
15	**	Angle Plate	128x25x1.2	1
16	**	Gib Screw		2
17	JT9-TS-1503071	Socket Head Cap Screw	M6x30mm	1
18	**	Gib	110x7.27x5.57	1
19	**	Pivot Pin		1
20	**	Slide Bar (with riveted scales)	420x40x15	1

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List P - TAPER ATTACHMENT ASSEMBLY (OPTIONAL) (continued)

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
21	JT9-TS-1503081	Socket Head Cap Screw	M6x35mm	1
22	**	Angle Plate	126x25x1.2	1
23	JT9-TS-2236181	Socket Head Cap Screw	M6x18mm	1
24	JT9-E1440VS-J24	Strip	80x31x13	1
25	CM9-TS-1503031	Socket Head Cap Screw	M6x12mm	2
26	**	Base	460x130x18	1
27	**	Screw	Ø3/8"(Ø9.525)x105L	1
28	**	Nut	Ø22x22L	1
29	**	Screw Block	19x19x22	1
30	**	Knurled Nut	Ø28(Ø20)x19L	1
31	**	Pin	3x15mm	1
32	JT9-E1440VS-J32	Pivot	Ø3/4"x65L	1
34	JT9-E1440VS-J33	Rod	Ø1/2"x300L	1
35	CM9-TS-1503041	Socket Head Cap Screw	M6x16mm	1
36	**	Block	25x25x10	1
37	**	Flat Head Screw	M5x8	6
38	JT9-TS-1504061	Hex Socket Cap Screw	M8x30	2
39	JT9-TS-1550061	Flat Washer	M8	2
40	**	Slide Block		1
41	CM9-TS-2311061	Hex Nut	M6	4
	JT9-892035	Taper Assembly (#1 thru 41)		1

** These parts are shown for reference only and are not available for order individually. Non-proprietary parts, such as fasteners, can usually be found at local hardware stores.


mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram Q - COLLET CLOSER ASSEMBLY (OPTIONAL)

Original JET parts reference | Match model, voltage and serial-number notes

COLLET CLOSER ASSEMBLY (OPTIONAL)

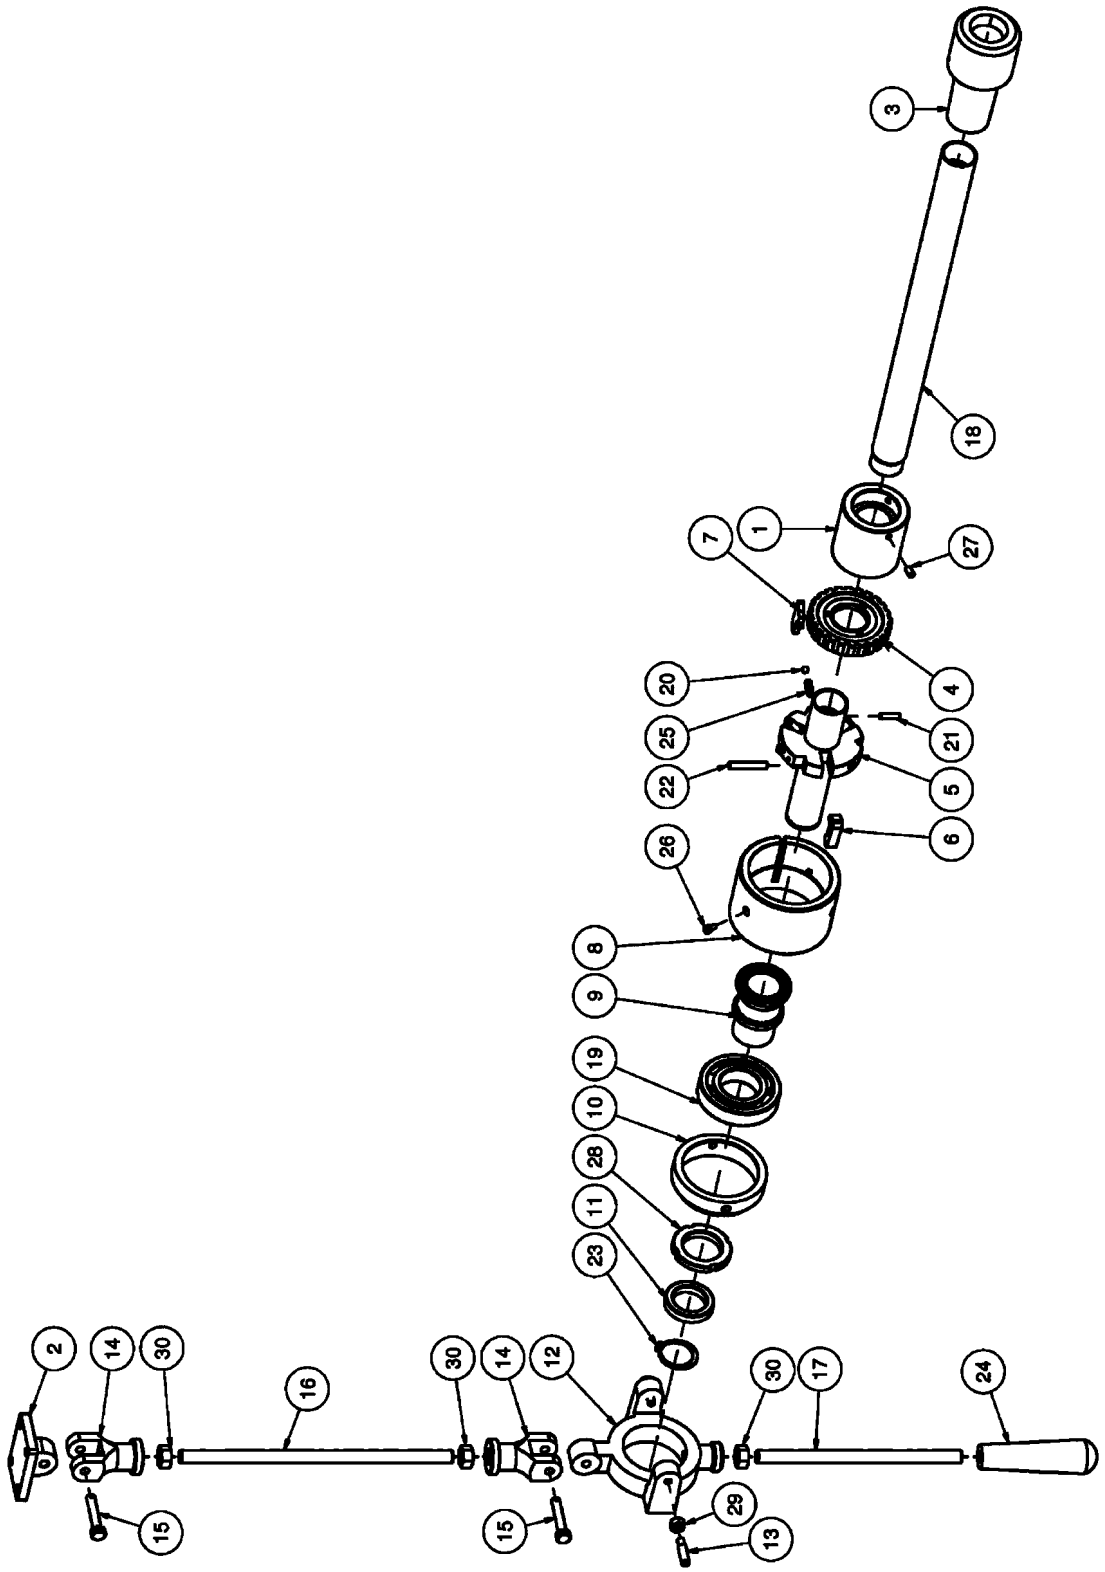

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List Q - COLLET CLOSER ASSEMBLY (OPTIONAL)

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
1	**	Sleeve Coupling		1
2	**	Fixed Seat (Length)		1
3	**	Sleeve	#5	1
4	**	Coupling		1
5	**	Arbor		1
6	JT9-C54006001	Buckle		3
7	**	Buckling Plate		1
8	**	Outward Flange		1
9	**	Bearing Shaft		1
10	**	Bearing Stand		1
11	**	Collar		1
12	**	Bearing Body		1
13	**	Set Screw		2
14	**	Coupling		2
15	**	Special Pin		2

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List Q - COLLET CLOSER ASSEMBLY (OPTIONAL) (continued)

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
16	**	Stud	273L	1
17	**	Lever Shaft	205L	1
18	**	Draw Bar	492L	1
19	JT9-BB-6208ZZ	Ball Bearing	6208ZZ	1
20	JT9-SB-6MM	Steel Ball	Ø6.0	1
21	JT9-5510484	Spring Pin	5 x 20L	1
22	**	Spring Pin	1/4" x1-1/2L	3
23	**	Retaining Ring (external)	32	1
24	**	Grip	1/2"	1
25	**	Spring		1
26	JT9-TS-1501021	Hex Socket Cap Screw	M4 x 8L	3
27	CM9-TS-1523031	Set Screw	M6 x10L	3
28	**	Locking Nut	AN08	1
29	**	Hex Nut	5/16”	2
30	**	Hex Nut	1/2”	3
	JT9-892036	5C Collet Closer Assembly (#1 thru	30)	1

** These parts are shown for reference only and are not available for order individually. Non-proprietary parts, such as fasteners, can usually be found at local hardware stores.


mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram R - STEADY REST ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

STEADY REST ASSEMBLY

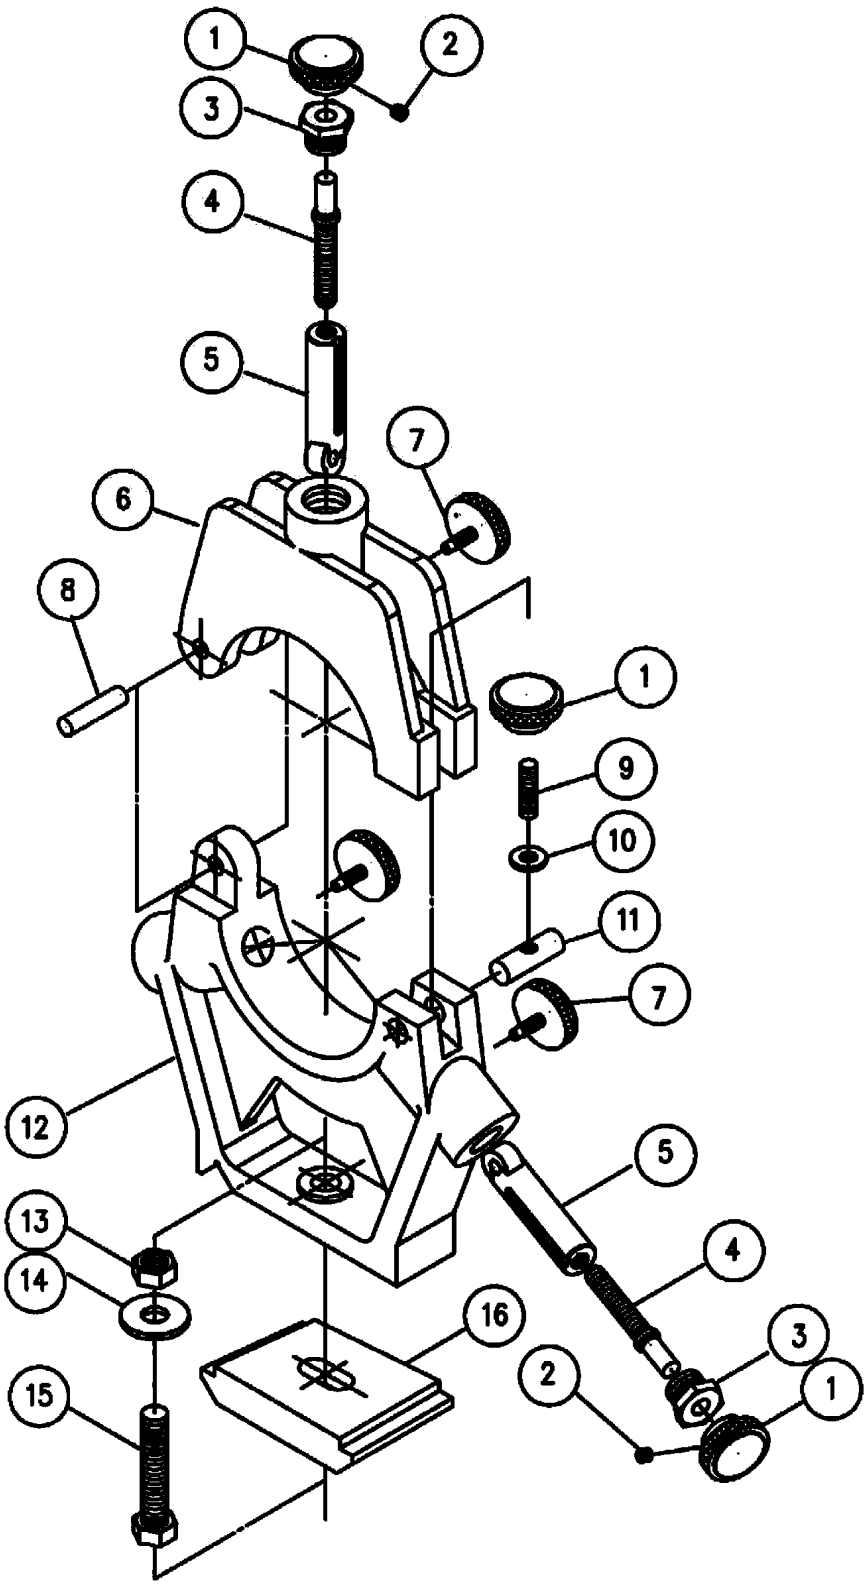

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List R - STEADY REST ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
1	JT9-E1440VS-FR01	Nut	Ø20xØ24x25L	4
2	JT9-TS-1523011	Set Screw	M6*6mm	3
3	JT9-E1440VS-FR03	Screw	Ø23x17L	3
4	JT9-E1440VS-FR04	Set Screw	Ø9.5x77L	3
	JT9-E1440VS-FR01A	Nut Assembly (includes #1~4)		3
5	JT9-E1440VS-FR05	Bearing Shaft	Ø18.8(Ø24)x83L	3
6	JT9-E1440VS-SR06	Arm	168x40x130 mm	1
7	JT9-E1440VS-FR07	Set Screw	Ø20xØ4.5x30L	3
8	JT9-E1440VS-SR08	Shaft	Ø8x40L	1
9	JT9-E1440VS-SR09	Set Screw	M8*55mm	1
10	JT9-TS-0732061	Washer	3/8 in	1
11	JT9-E1440VS-SR11	Pin	Ø12.7x40L	1
12	JT9-E1340VS-SR12	Base 13”	246x40x194	1
	JT9-E1440VS-SR12	Base 14”	247x40x194	1
13	JT9-JWS25-202	Hex Nut	1/2-13 in	1
14	JT9-TS-0680061	Flat Washer	1/2 in.	1
15	**	Hex Cap Screw	12-13 x 2-1/2 in.	1
16	JT9-E1340VS-F31 JT9-E1340VS-SRA JT9-E1440VS-SRA	Clamp Plate Steady Rest Assembly for E-1340VS Steady Rest Assembly for E-1440VS	106L*70W*22h (#1~16) (#1~16)	1


** These parts are shown for reference only and are not available for order individually. Non-proprietary parts, such as fasteners, can usually be found at local hardware stores.

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Diagram S - FOLLOW REST ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

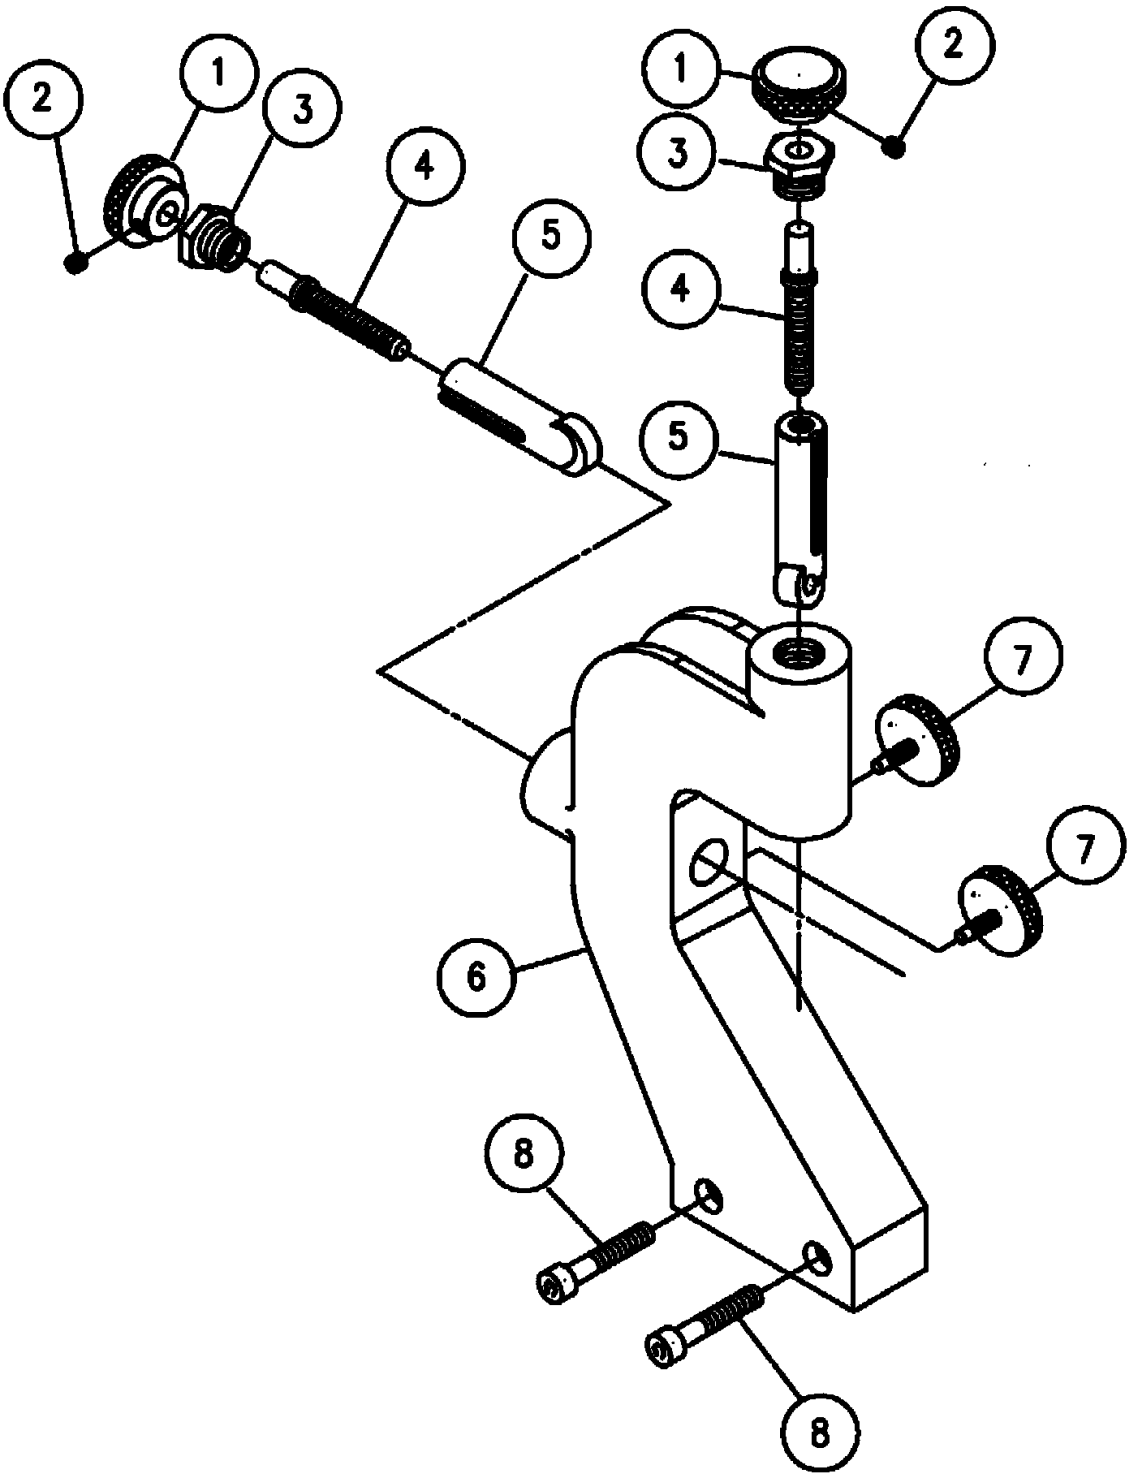

mmToolParts
Big Time Experience. Small Town Service. .com

JET E-1440VS | Stock 892030

Parts List S - FOLLOW REST ASSEMBLY

Original JET parts reference | Match model, voltage and serial-number notes

Ref.	Part number	Description	Size	Qty.
1	JT9-E1440VS-FR01	Nut	Ø20xØ24x25L	2
2	JT9-TS-1523011	Set Screw	M6*6mm	2
3	JT9-E1440VS-FR03	Screw	Ø23x17L	2
4	JT9-E1440VS-FR04	Set Screw	Ø9.5x77L	2
	JT9-E1440VS-FR01A	Nut Assembly (includes #1~4)		2
5	JT9-E1440VS-FR05	Bearing Shaft	Ø18.8(Ø24)x83L	2
	JT9-E1440VS-FR06	Follow Rest (for 1440VS)	175x40x280 mm	1
7	JT9-E1440VS-FR07	Set Screw	Ø20(Ø4.5)x30L	2
8	JT9-TS-1490081 JT9-E1340VS-FRA JT9-E1440VS-FRA	Socket Head Cap Screw Follow Rest Assembly for E-1340VS Follow Rest Assembly for E-1440VS	M8*45mm (#1~8) (#1~8)	2

mmToolParts
Big Time Experience. Small Town Service. .com